



PK 7.001 SLD 3

PERFECT DIMENSIONS


STD

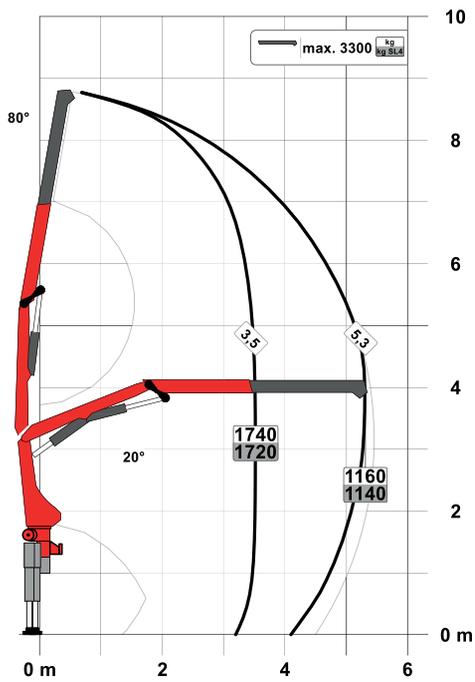


A

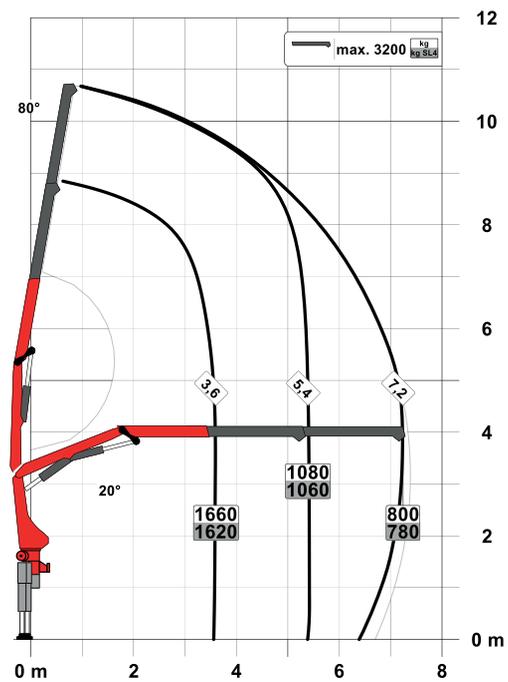

C

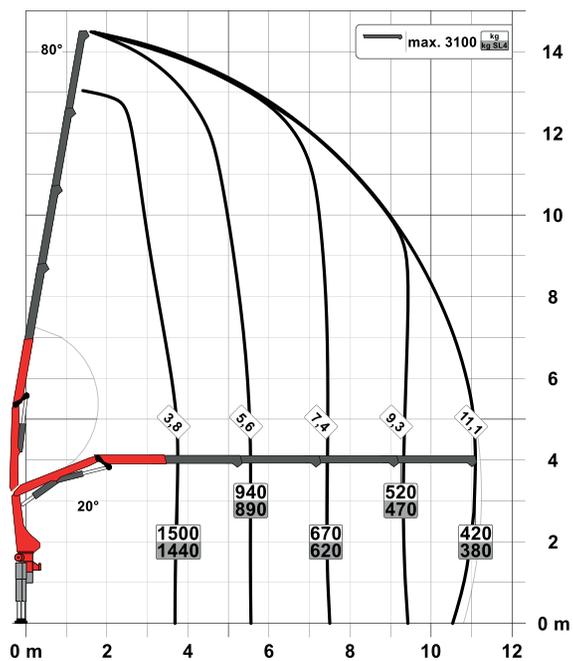

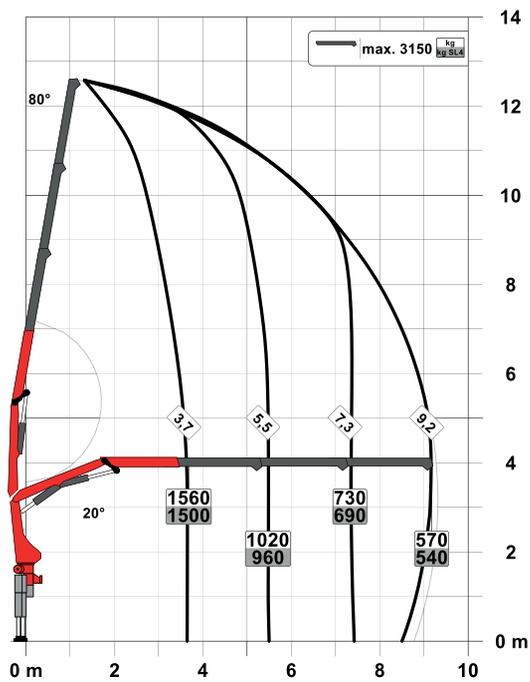B

SLD 3


- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - Radio remote control
- NON-CE and CE model

Technical specifications

EN 12999 HC1 HD4/S2

| | | |
|-------------------------------|---------------------------|--------------------------|
| Max. lifting moment | 6.2 mt/ 60.4 kNm | 44530 ft.lb |
| Max. lifting capacity | 3300 kg/ 32.4 kN | 7300 lb |
| Max. hydraulic outreach | 11.2 m | 36' 9" |
| Max. manual outreach | 12.9 m | 41' 12" |
| Slewing angle | 400° | |
| Slewing torque | 0.8 mt/ 7.8 kNm | 5750 ft.lb |
| Stabiliser spread (std./max.) | 3.0 m/ 5.0 m | 9' 10"/ 16' 3" |
| Fitting space required (std.) | 0.66 m | 2' 2" |
| Width folded | 2.2 m | 7' 3" |
| Max. operating pressure | 330 bar | 4785 psi |
| Recommended pump capacity | from 20 l/min to 30 l/min | 5.3 US gpm to 7.9 US gpm |
| Dead weight (std.) | 750 kg | 1650 lb |

DIMENSIONS

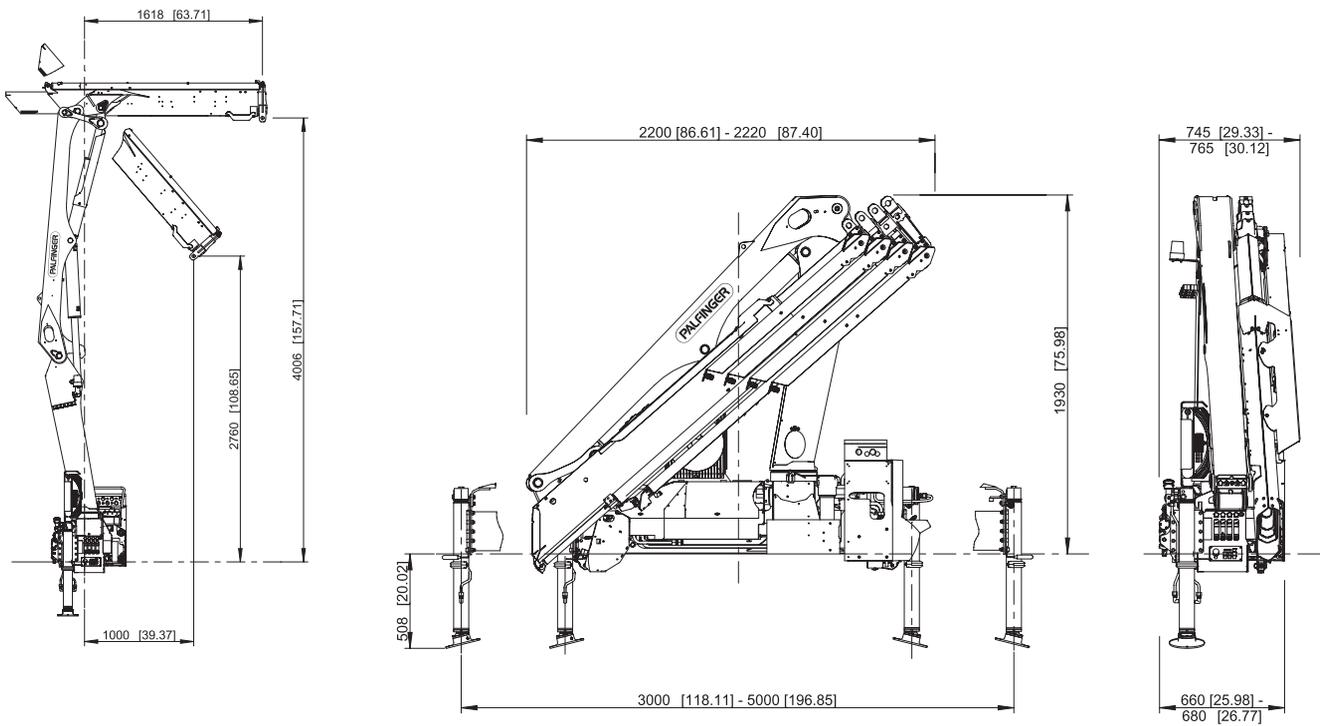

KP-PK7/75SLDM2+EN

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.