



PK 7.001 SLD 1 (NON-CE)

PERFECT DIMENSIONS


STD

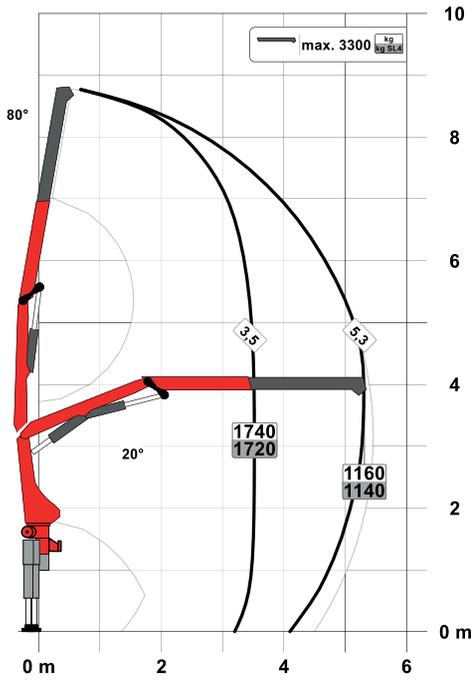


A

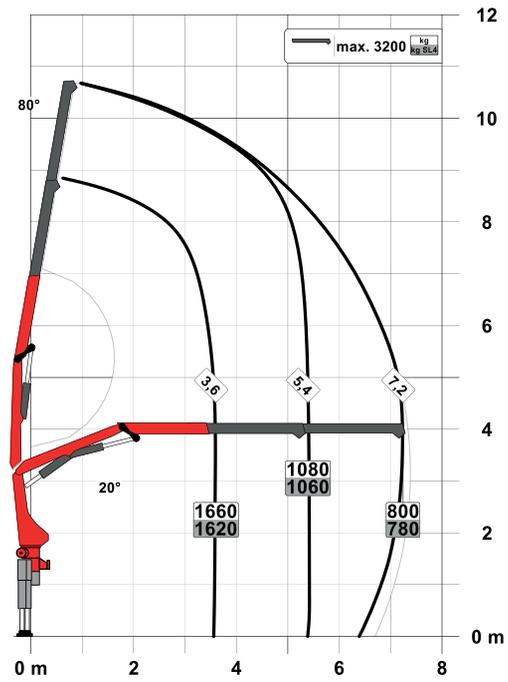

C

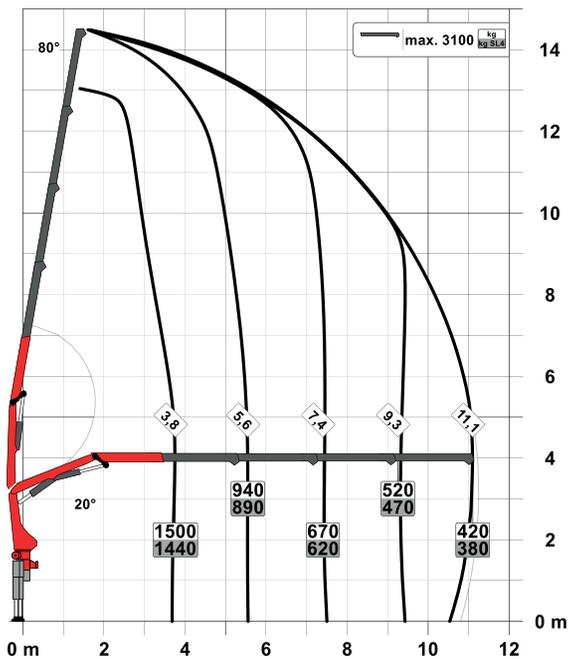

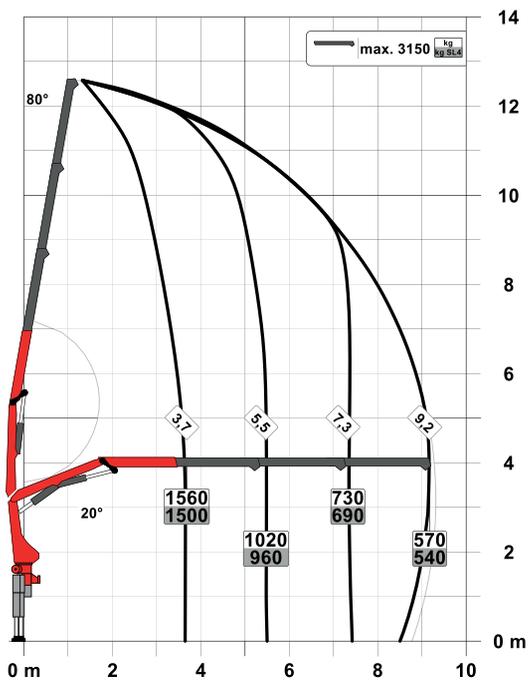B

SLD 1 (NON-CE)


- Single Link
- Optional:
 - Overload protection OSK
 - Radio remote control
- NON-CE mode

Technical specifications

EN 12999 HC1 HD4/S2

Max. lifting moment	6.2 mt/ 60.4 kNm	44530 ft.lb
Max. lifting capacity	3300 kg/ 32.4 kN	7300 lb
Max. hydraulic outreach	11.2 m	36' 9"
Max. manual outreach	12.9 m	41' 12"
Slewing angle	400°	
Slewing torque	0.8 mt/ 7.8 kNm	5750 ft.lb
Stabiliser spread (std./max.)	3.0 m/ 5.0 m	9' 10"/ 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.2 m	7' 3"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 20 l/min to 30 l/min	5.3 US gpm 7.9 US gpm
Dead weight (std.)	750 kg	1650 lb

DIMENSIONS

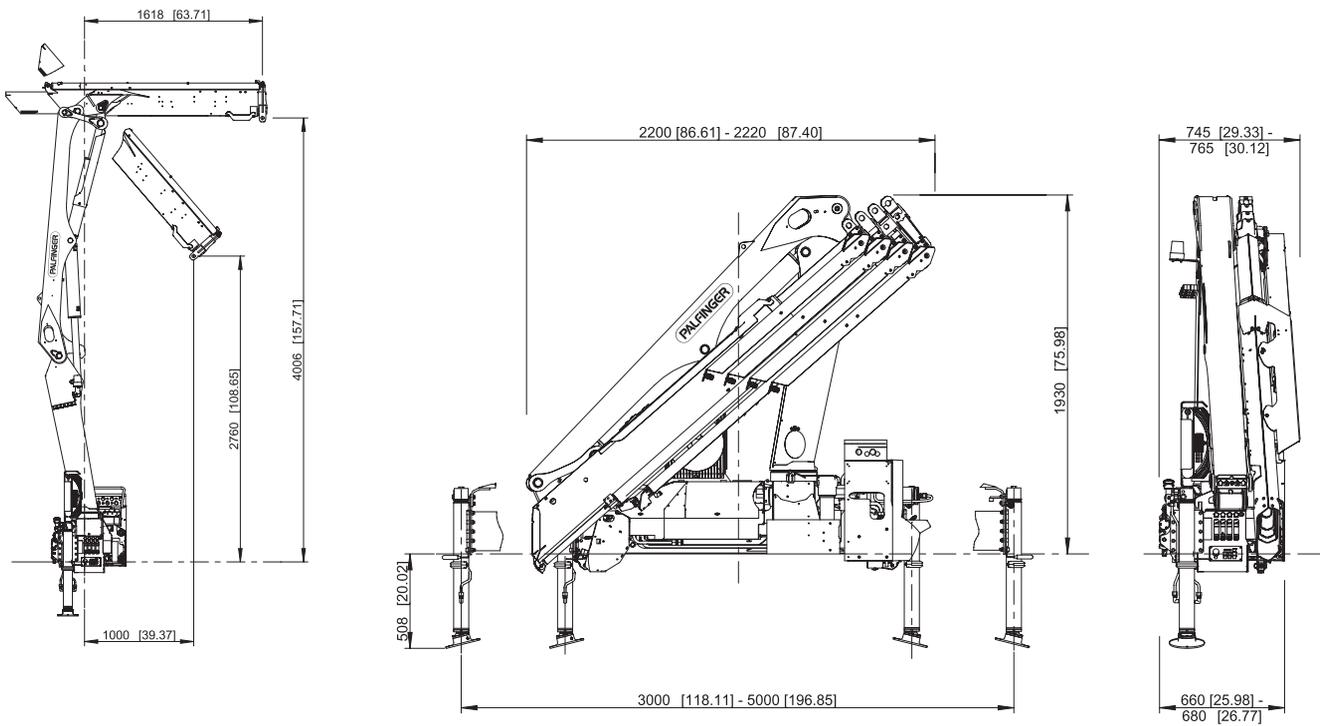

KP-PK7/75SLDM2+EN

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.