


PK 14002 EH


HIGH PERFORMANCE

A synergy of function and design.


A

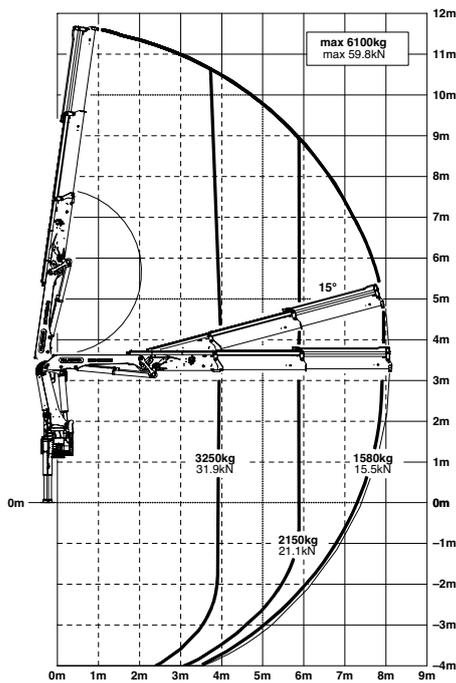


B

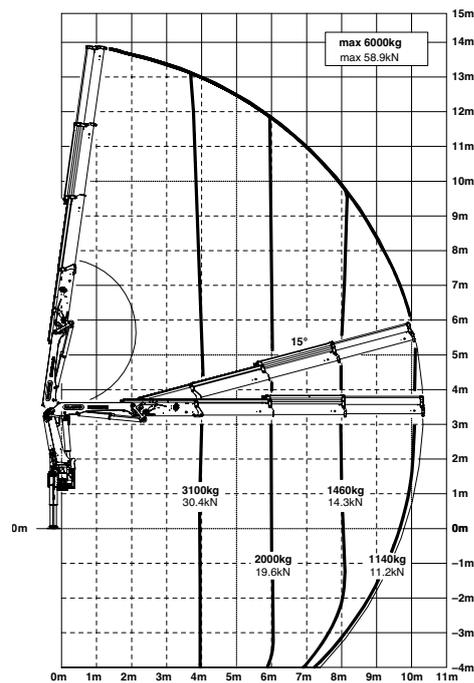

D

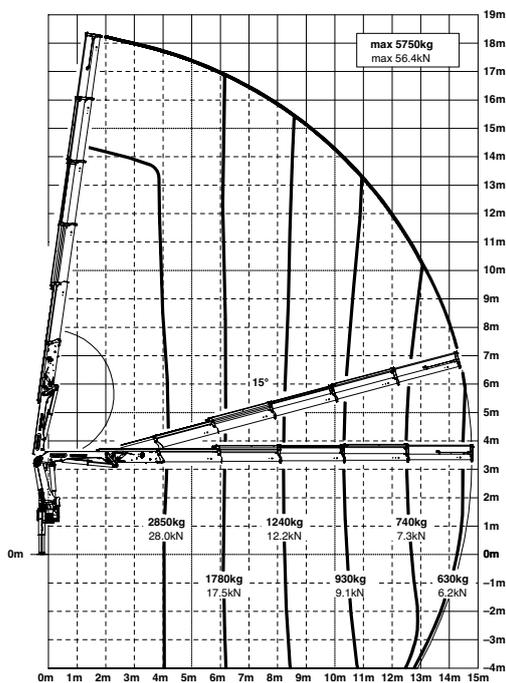


E

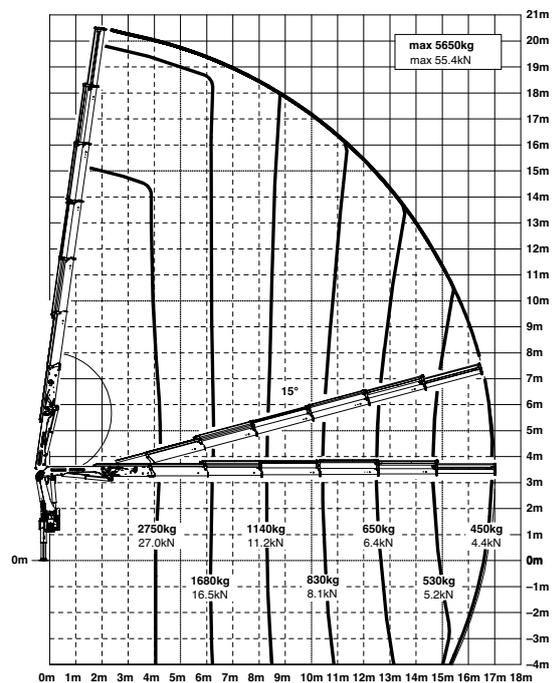

The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

Lifting capacities

C

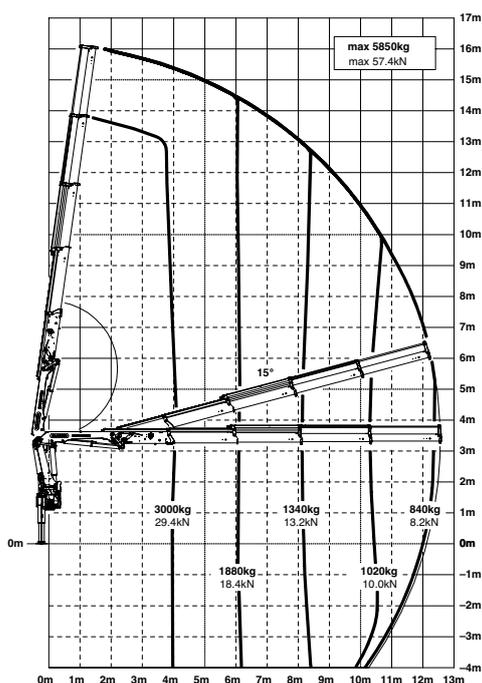

max.		6100 kg	13440 lbs	A
3.9 m	12' 10"	3250 kg	7200 lbs	
5.9 m	19' 4"	2150 kg	4700 lbs	
7.9 m	25' 11"	1580 kg	3500 lbs	

max.		6000 kg	13200 lbs	B
4.0 m	13' 1"	3100 kg	6900 lbs	
6.0 m	19' 8"	2000 kg	4400 lbs	
8.0 m	26' 3"	1460 kg	3200 lbs	
10.1 m	33' 2"	1140 kg	2500 lbs	
12.4 m*	40' 8"	860 kg	1900 lbs	
14.6 m*	47' 11"	670 kg	1480 lbs	

max.		5850 kg	12890 lbs	C
4.1 m	13' 5"	3000 kg	6600 lbs	
6.1 m	20' 0"	1880 kg	4150 lbs	
8.1 m	26' 7"	1340 kg	2950 lbs	
10.2 m	33' 6"	1020 kg	2250 lbs	
12.4 m	40' 8"	840 kg	1840 lbs	
14.6 m*	47' 11"	660 kg	1460 lbs	
16.8 m*	55' 1"	530 kg	1170 lbs	

max.		5750 kg	12670 lbs	D
4.2 m	13' 9"	2850 kg	6300 lbs	
6.2 m	20' 4"	1780 kg	3900 lbs	
8.2 m	26' 11"	1240 kg	2750 lbs	
10.3 m	33' 10"	930 kg	2050 lbs	
12.5 m	41' 0"	740 kg	1640 lbs	
14.6 m	47' 11"	630 kg	1380 lbs	
16.8 m*	55' 1"	500 kg	1100 lbs	
18.8 m*	61' 8"	410 kg	900 lbs	

max.		5650 kg	12450 lbs	E
4.3 m	14' 1"	2750 kg	6000 lbs	
6.3 m	20' 8"	1680 kg	3700 lbs	
8.3 m	27' 3"	1140 kg	2550 lbs	
10.4 m	34' 1"	830 kg	1840 lbs	
12.6 m	41' 4"	650 kg	1420 lbs	
14.7 m	48' 3"	530 kg	1160 lbs	
16.8 m	55' 1"	450 kg	1000 lbs	
18.9 m*	62' 0"	370 kg	820 lbs	

*mechanical extension