


THE RIGHT SPECIFICATION FOR YOUR MATERIAL HANDLING NEEDS


Technical Data

Model	Maximum Lifting Moment (ft. lbs)	Gross Rotation Torque (ft. lbs)	Slewing Range	Stabilizer Spread	Weight (FL, R3x, STZ3, 4) (lbs)	Maximum Horizontal Reach	Maximum Vertical Reach	Maximum Horizontal Capacity (lbs)
PW 32001 A	194,790	42,700	470°	21'8"	6,742	43'	55'6"	4,450 @ 42'
PW 32001 B	174,220	42,700	470°	21'8"	7,716	52'8"	64'8"	2,950 @ 52'
PW 32001 C	159,850	42,700	470°	21'8"	7,829	61'	73'2"	2,050 @ 61'
PW 35001-SH A	218,170	42,700	470°	21'8"	6,742	43'	55'6"	5,000 @ 42'
PW 35001-SH B	197,590	42,700	470°	21'8"	7,716	52'8"	64'8"	3,400 @ 52'
PW 35001-SH C	183,220	42,700	470°	21'8"	7,829	61'	73'2"	2,450 @ 61'
PW 38001 B	227,180	51,330	470°	24'4"	8,550	52'9"	64'8"	3,950 @ 52'
PW 38001 C	231,430	51,330	470°	24'4"	9,240	61'	73'2"	2,900 @ 61'
PW 42001-SH B	256,110	51,330	470°	24'4"	8,770	52'9"	64'8"	4,500 @ 52'
PW 42001-SH C	241,640	51,330	470°	24'4"	9,480	61'	73'2"	3,350 @ 61'
PW 50001-SH C	253,220	51,330	470°	24'4"	11,710	80'9"	93'	1,780 @ 76'

PW 35001-SH C

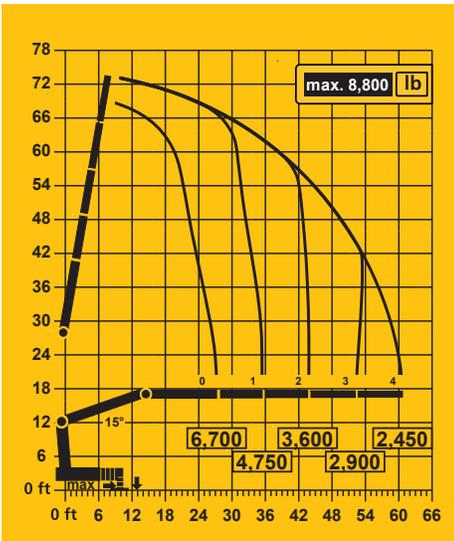

PW 42001 C

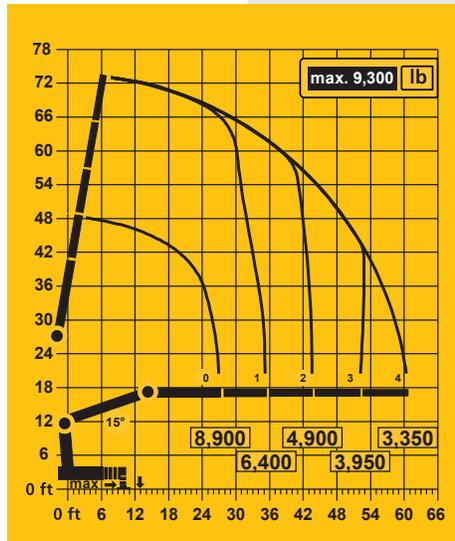

PW 50001-SH C

