



PERFECT DIMENSIONS


STD

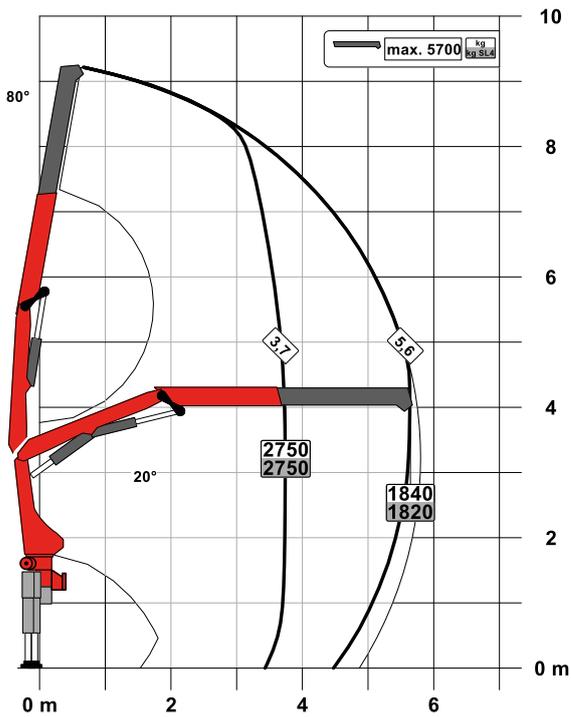


A

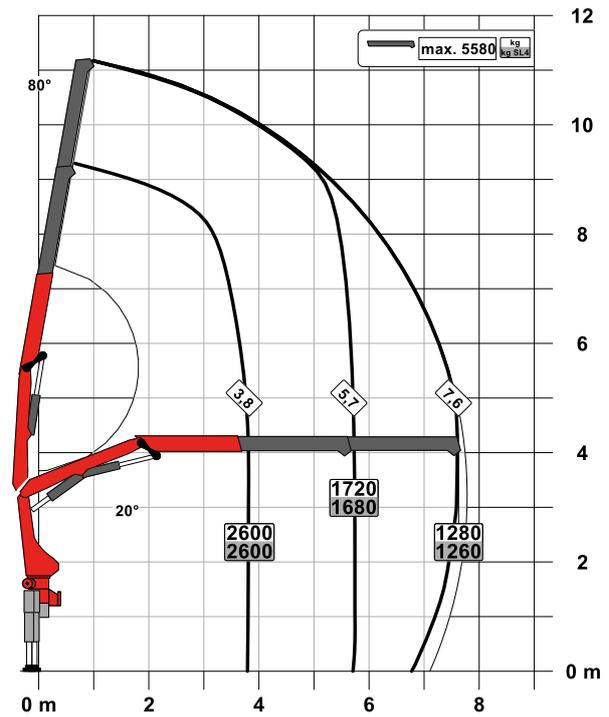

C

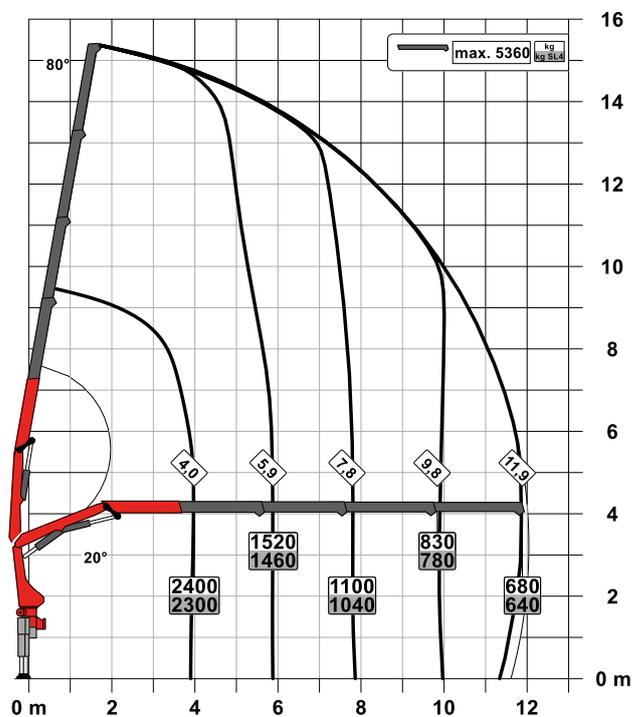

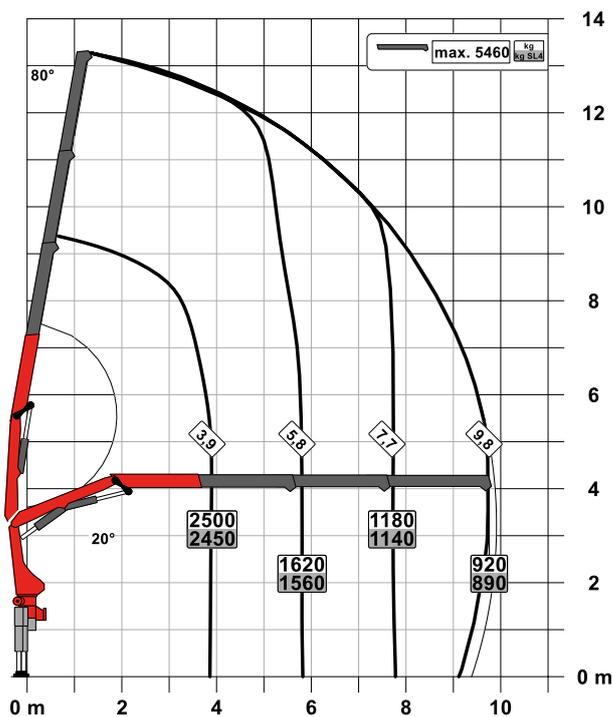B

SLD 3

- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - High stand control
 - Radio remote control
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

Technical specifications

EN 12999 HC1 HD4/S2

Max. lifting moment	10.3 mt/101.4 kNm	74740 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	12.0 m	39' 6"
Max. manual outreach	15.9 m	52' 2"
Slewing angle	400°	
Slewing torque	1.3 mt/12.7 kNm	9370 ft.lb
Stabiliser spread (std./max.)	3.3 m/ 5.6 m	10' 10"/ 18' 4"
Fitting space required (std.)	0.72 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 30 l/min to 45 l/min	7.9 US gpm to 11.9 US gpm
Dead weight (std.)	1140 kg	2510 lb