



PK 7.501 SLD 5

# PERFECT DIMENSIONS


STD

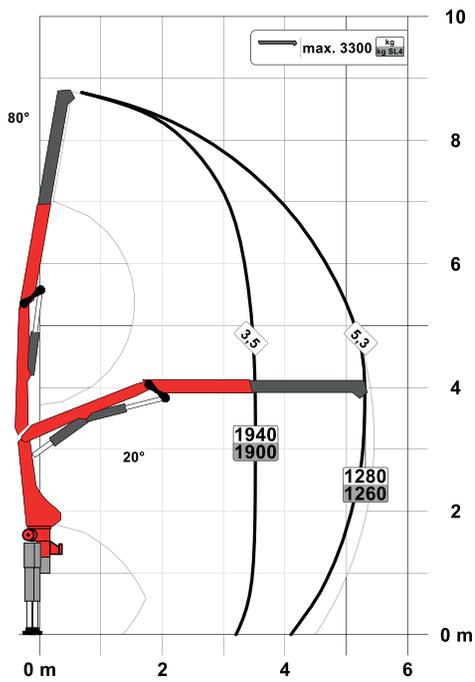


A

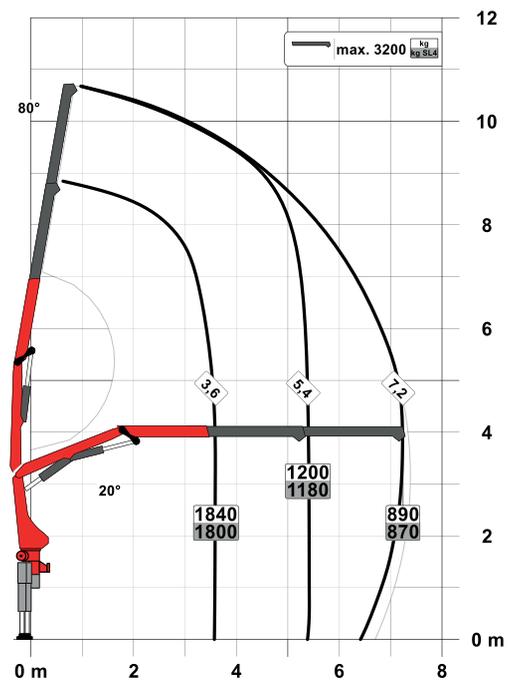

C

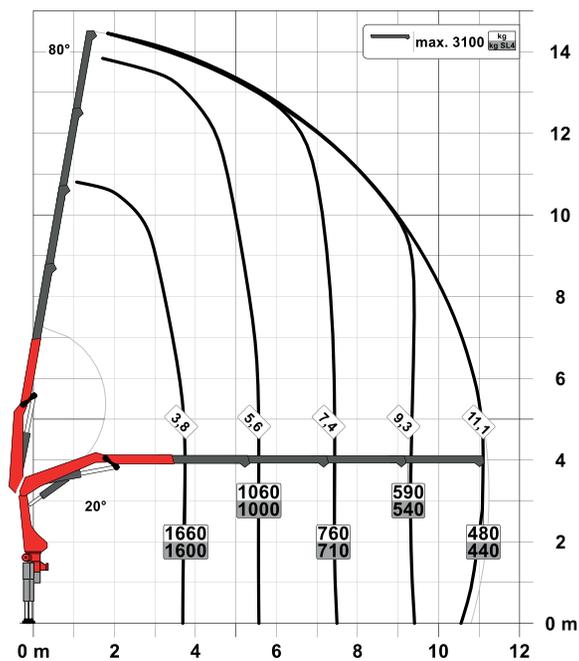

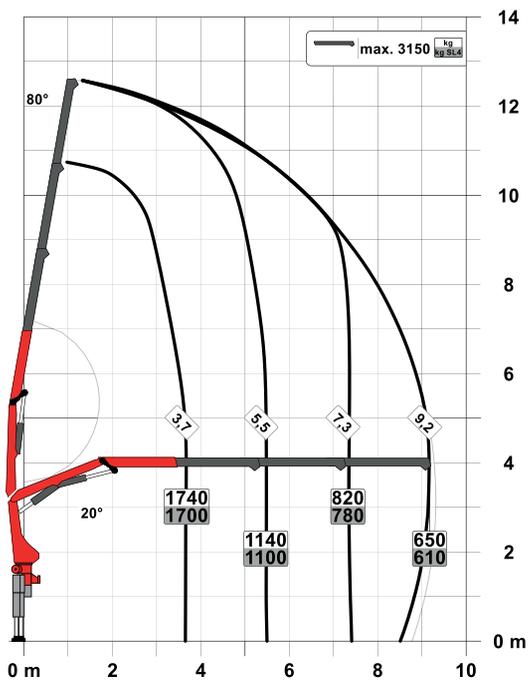**B**

## SLD 5


- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
  - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
- NON-CE and CE model

## Technical specifications

### EN 12999 HC1 HD4/S2

|                               |                           |                           |
|-------------------------------|---------------------------|---------------------------|
| Max. lifting moment           | 6.8 mt/ 66.9 kNm          | 49340 ft.lb               |
| Max. lifting capacity         | 3300 kg/ 32,4 kN          | 7300 lb                   |
| Max. hydraulic outreach       | 11.2 m                    | 36' 9"                    |
| Max. manual outreach          | 12.9 m                    | 41' 12"                   |
| Slewing angle                 | 400°                      |                           |
| Slewing torque                | 0.8 mt/ 7.8 kNm           | 5750 ft.lb                |
| Stabiliser spread (std./max.) | 3.0 m/ 5.0 m              | 9' 10"/ 16' 3"            |
| Fitting space required (std.) | 0.66 m                    | 2' 2"                     |
| Width folded                  | 2.2 m                     | 7' 3"                     |
| Max. operating pressure       | 360 bar                   | 5220 psi                  |
| Recommended pump capacity     | from 30 l/min to 40 l/min | 7.9 US gpm to 10.6 US gpm |
| Dead weight (std.)            | 780 kg                    | 1720 lb                   |

**DIMENSIONS**

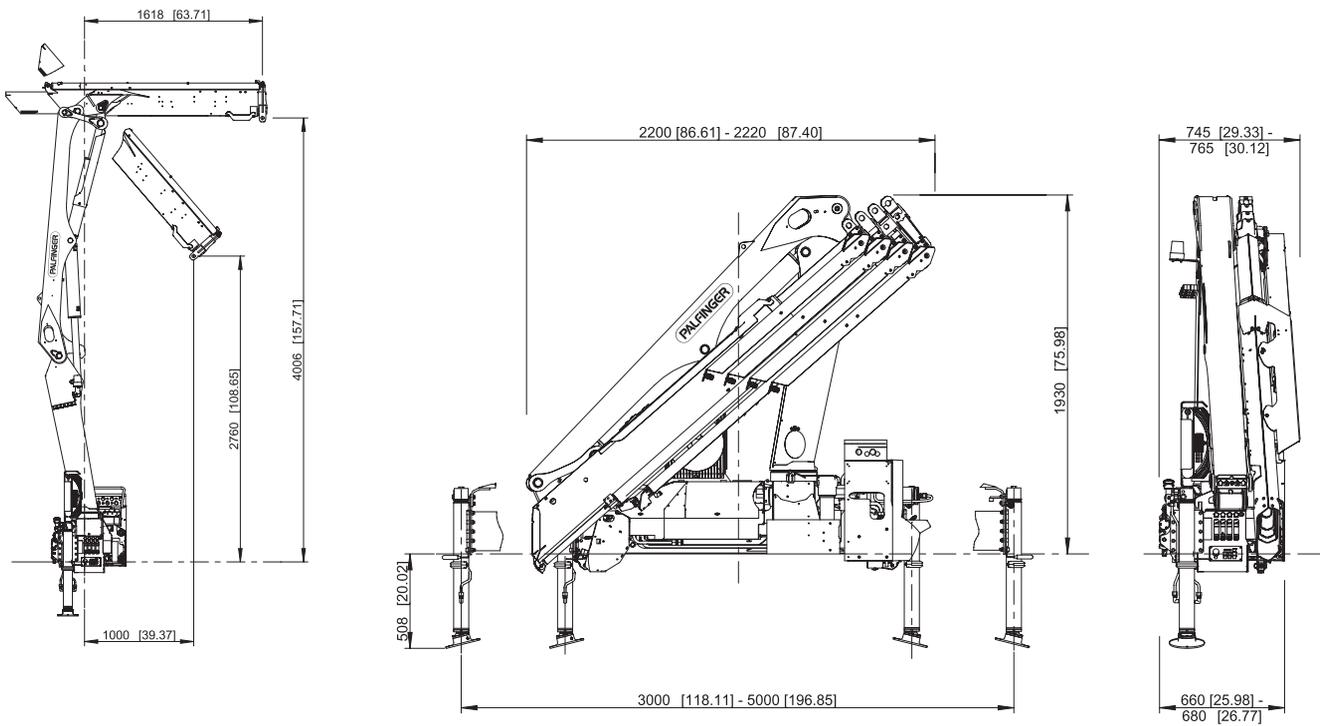

KP-PK7/75SLDM2+EN

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.