



PK 7.501 SLD 5

PERFECT DIMENSIONS


STD

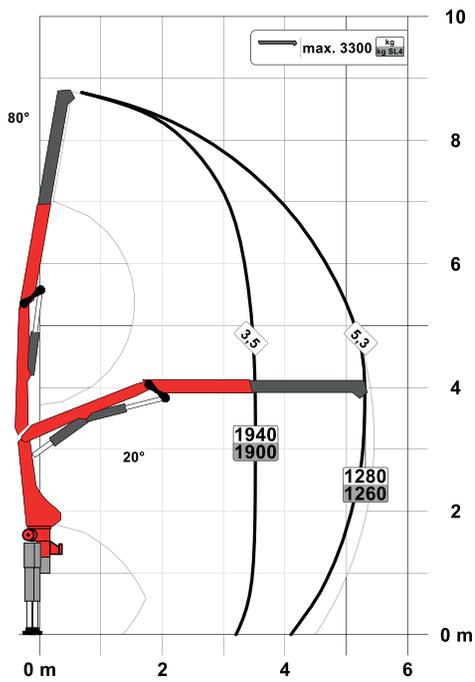


A

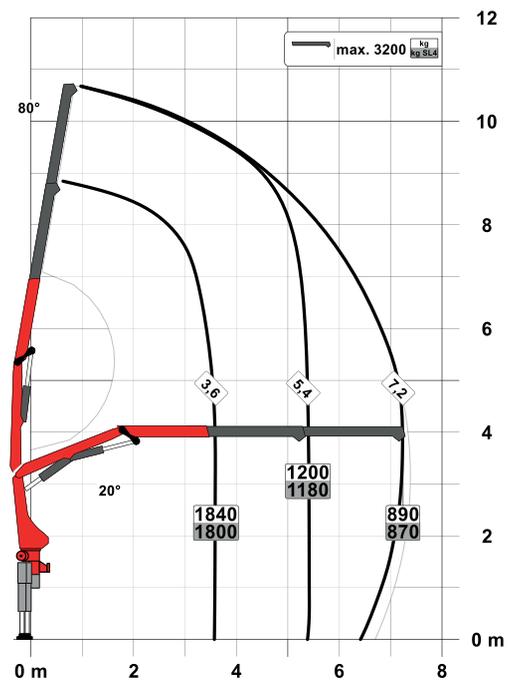

C

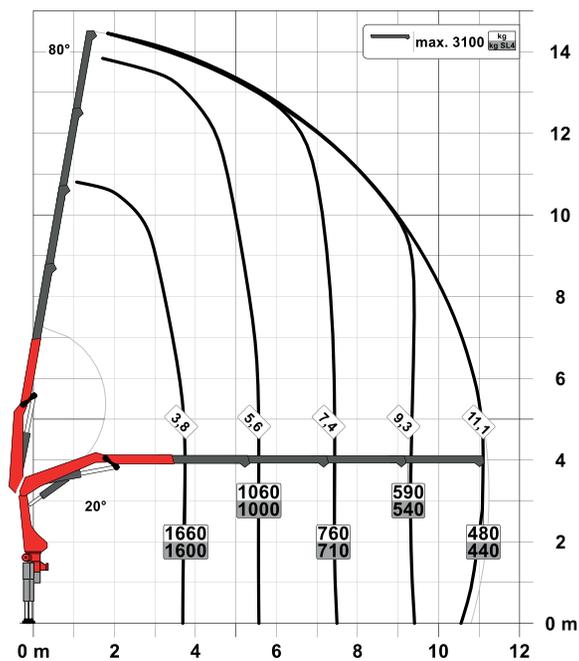

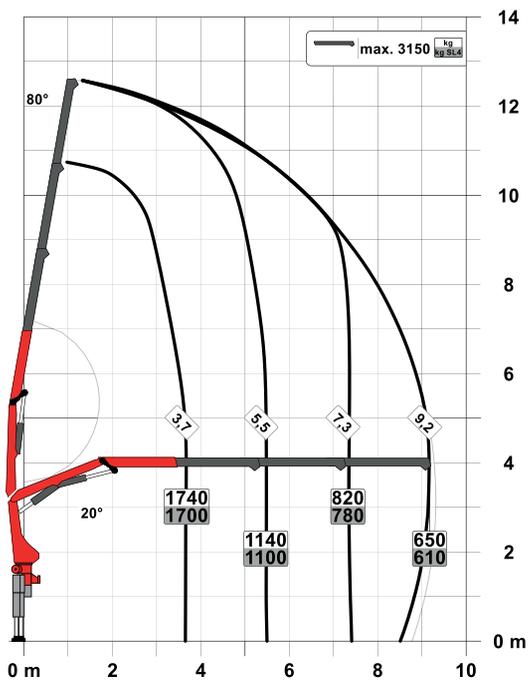B

SLD 5

- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
- NON-CE and CE model

Technical specifications

EN 12999 HC1 HD4/S2

Max. lifting moment	6.8 mt/ 66.9 kNm	49340 ft.lb
Max. lifting capacity	3300 kg/ 32,4 kN	7300 lb
Max. hydraulic outreach	11.2 m	36' 9"
Max. manual outreach	12.9 m	41' 12"
Slewing angle	400°	
Slewing torque	0.8 mt/ 7.8 kNm	5750 ft.lb
Stabiliser spread (std./max.)	3.0 m/ 5.0 m	9' 10"/ 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.2 m	7' 3"
Max. operating pressure	360 bar	5220 psi
Recommended pump capacity	from 30 l/min to 40 l/min	7.9 US gpm to 10.6 US gpm
Dead weight (std.)	780 kg	1720 lb