



PK 8.501 SLD 3

LIFTING CAPACITY DIAGRAMS


STD

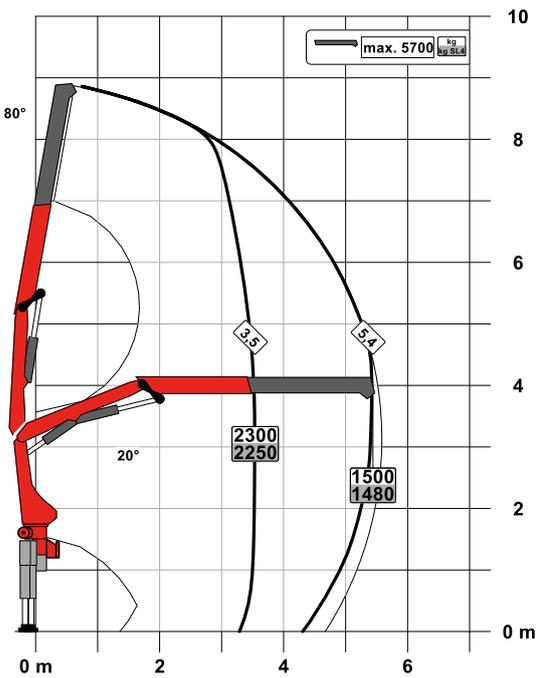


A

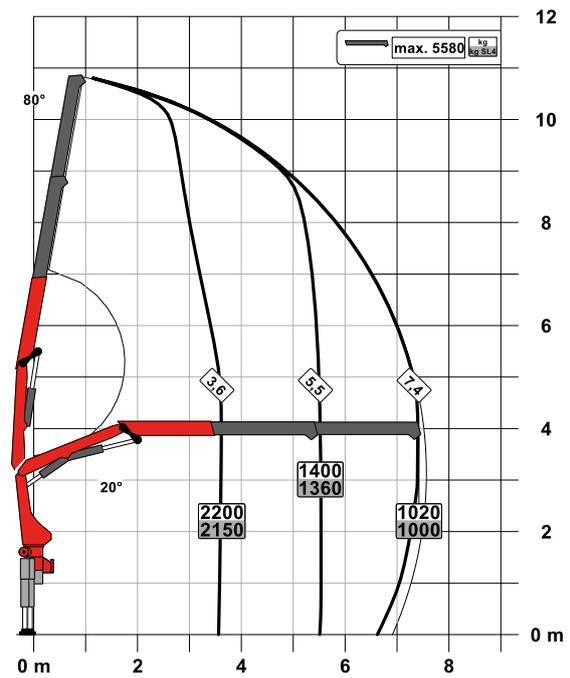

C

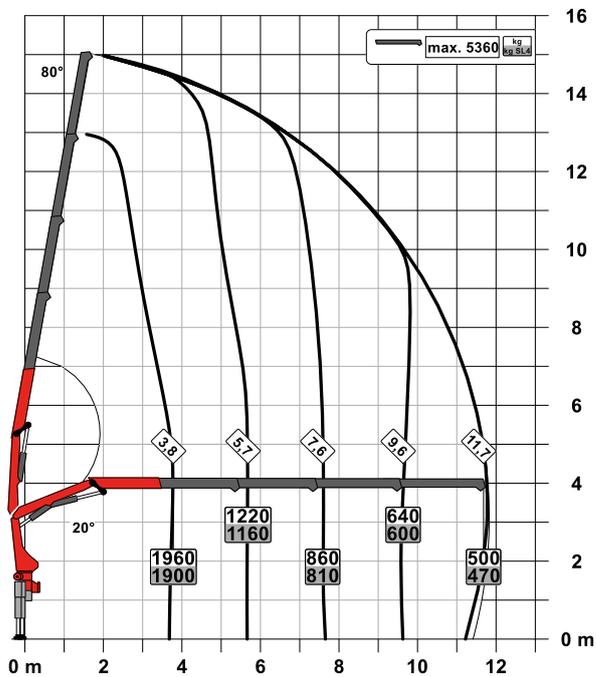

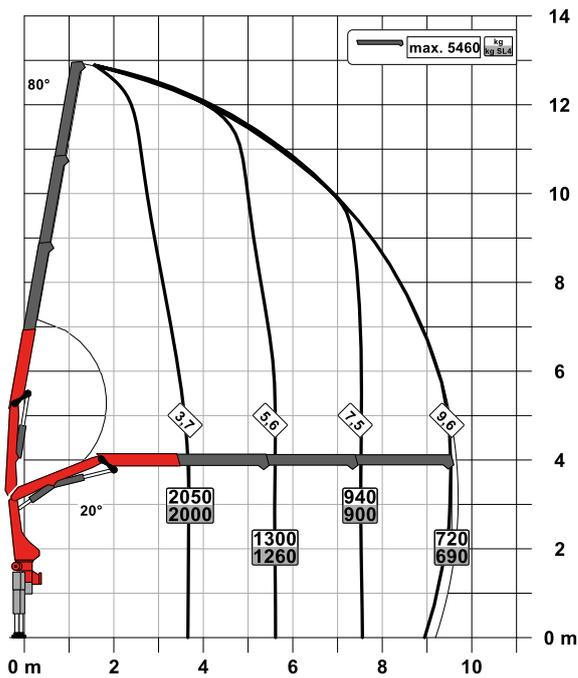B

MODEL LINE SLD 3

- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - High stand control
 - Radio remote control
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

TECHNICAL SPECIFICATIONS

EN 12999 HC1 HD4/S2

Max. lifting moment	8.1 mt/79.6 kNm	58710 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.72 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 25 l/min to 35 l/min	6.6 US gpm 9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb