



LIFTING CAPACITY DIAGRAMS


STD

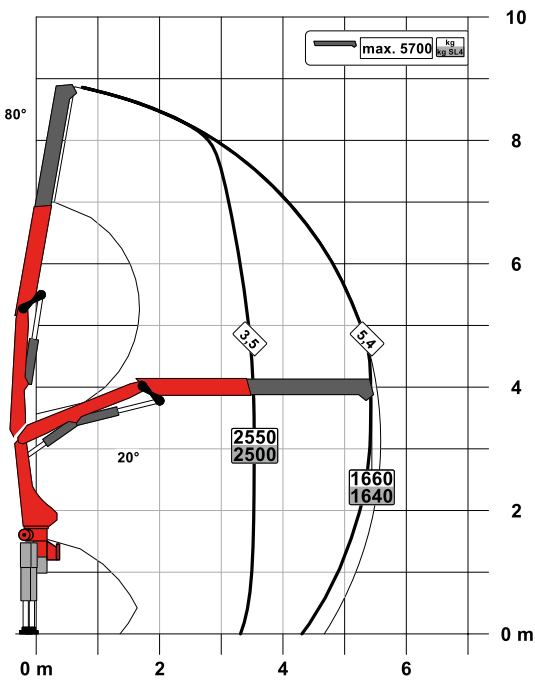


A

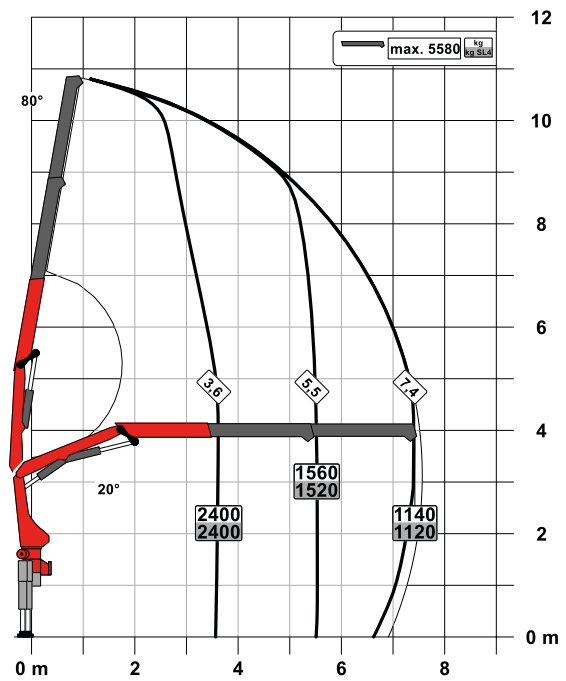

C

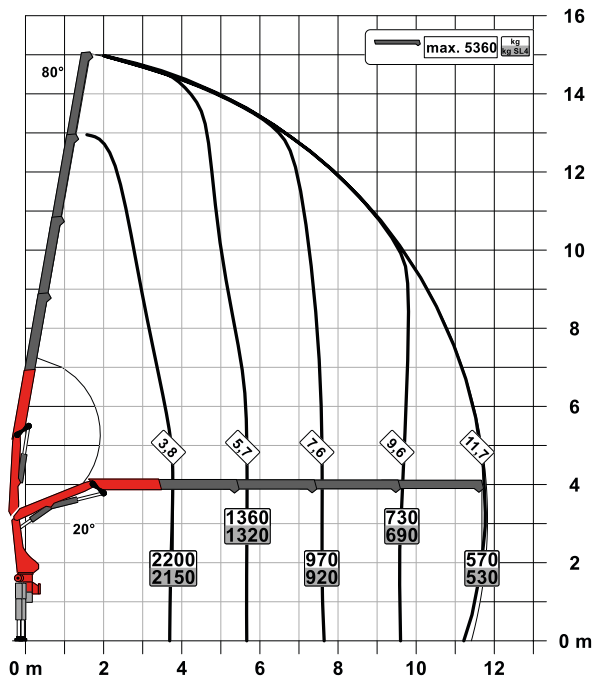

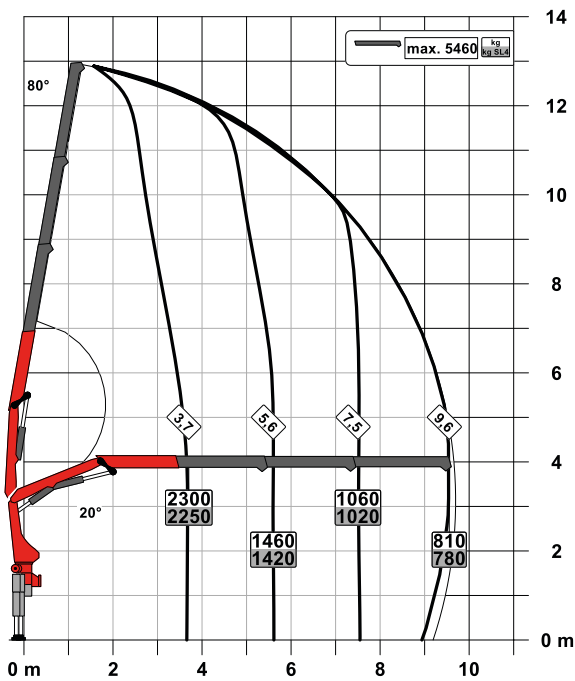B

MODEL LINE SLD 5

- Single Link
- Paltronic overload protection
- A-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

TECHNICAL SPECIFICATIONS

EN 12999 HC1 HD4/S2

Max. lifting moment	9.0 mt/88.2 kNm	65050 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.72 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	360 bar	5220 psi
Recommended pump capacity	from 40 l/min to 50 l/min	10.6 US gpm to 13.2 US gpm
Dead weight (std.)	1080 kg	2380 lb