



PK 5.001 SLD 3

# PERFECT DIMENSIONS


STD

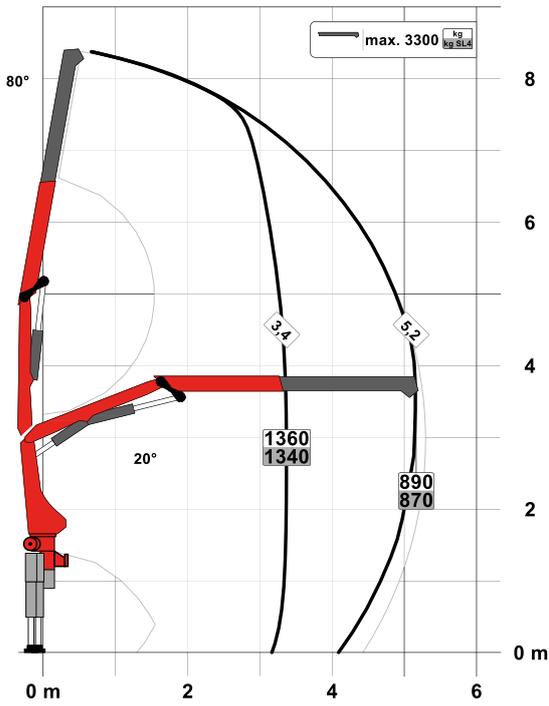


A

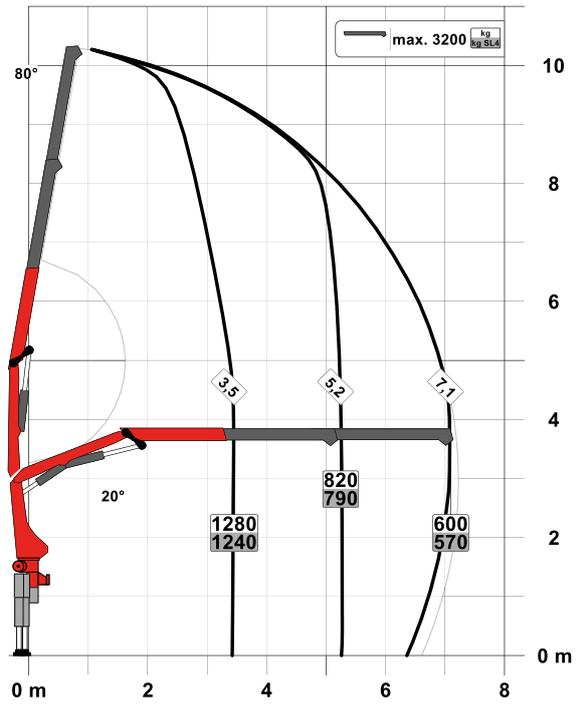

C

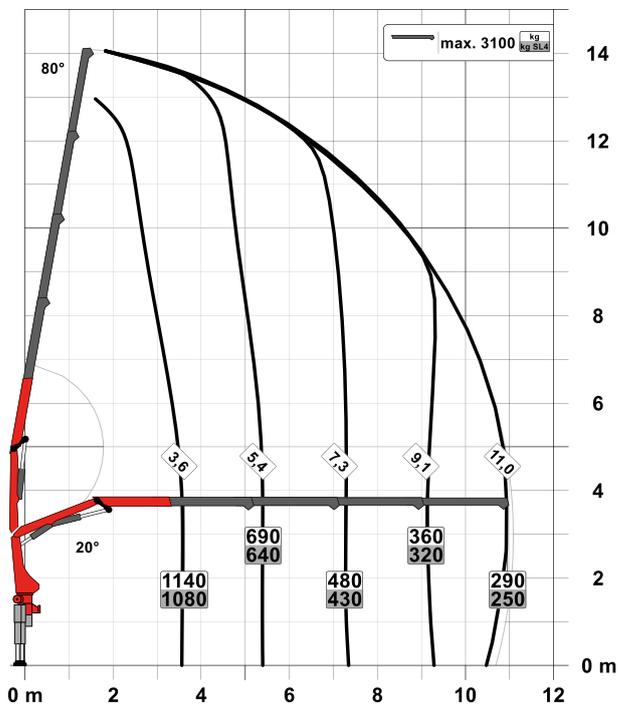

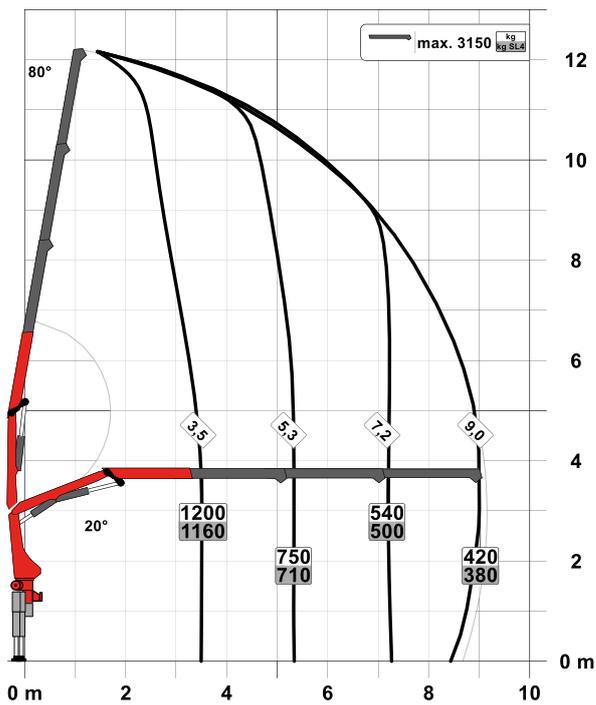**B**

### SLD 3


- Single Link
- Paltronic overload protection
- Optional:
  - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
  - Radio remote control
- NON-CE and CE model

### Technical specifications

#### EN 12999 HC1 HD4/S2

Max. lifting moment	4.6 mt/45.0 kNm	33,190 ft.lb
Max. lifting capacity	3300 kg/32.4 kN	7,300 lb
Max. hydraulic outreach	11.1 m	36' 5"
Max. manual outreach	12.7 m	41' 8"
Slewing angle	400°	
Slewing torque	0.6 mt/5.9 kNm	4,350 ft.lb
Stabiliser spread (std./max.)	2.9 m / 5.0 m	9' 6" / 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.10 m	6' 11"
Max. operating pressure	330 bar	4,785 psi
Recommended pump capacity	from 15 l/min to 25 l/min	4.0 US gpm to 6.6 US gpm
Dead weight (std.)	695 kg	1,530 lb

**DIMENSIONS**

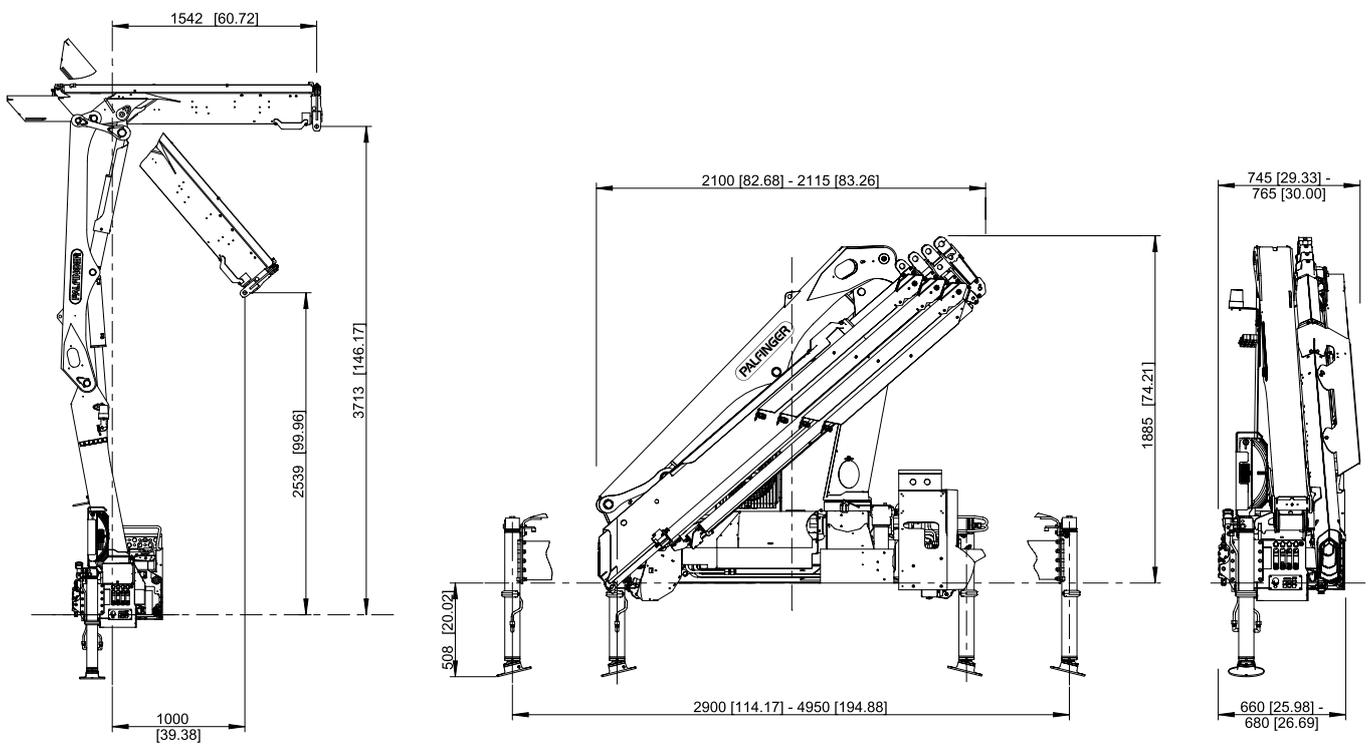

KP-PK5/55SLDM3+EN 01/20

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.