
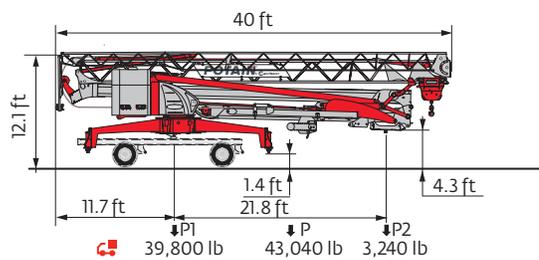


Transport

NORTH AMERICAN HIGHWAY AXLE (50 mph)

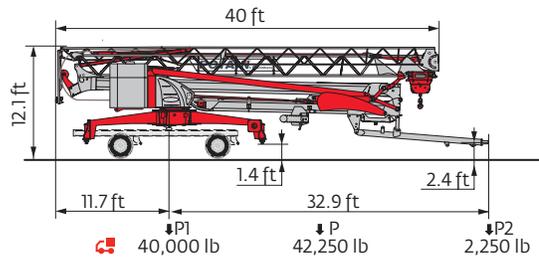

- R Rear slewing radius
- Reactions in service
- Reactions out of service
- Standard equipment
- Options
- ⚖️ Weight without load, without ballast, without transport axles, with max. jib and standard height
- ⚖️ Total ballast weight
- ↔️ Transport axles
- 🚛 Transport of crane with full ballast
- ⬆️ Hoisting
- 🚶 Trolleying
- ⚙️ Slewing
- ⚡ Required power

⚠️ This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

