



Transport Dimension

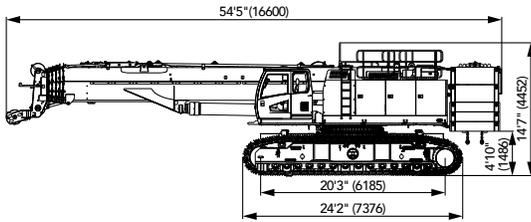


Basic Machine (with side frame, main & aux. winches and wire ropes, fly jib and aux. lifting sheave and full counterweights) ×1

Length (L)	54.5ft (16.6m)
Width (W)	19.2ft (5.86m)
Height (H)	14.6ft (4.45m)
Weight	274.40Klb (124.4mt)

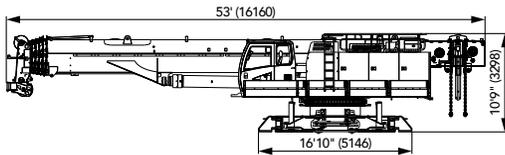


Basic Machine (with main & aux. winches, wire rope and aux. lifting sheave, without fly jib) ×1

Length (L)	53ft (16.16m)
Width (W)	9.8ft (2.99m)
Height (H)	10.8ft (3.29m)
Weight	98.3Klb (44.58mt)




Side Frame ×2

Length (L)	24.2ft (7.38m)
Width (W)	5.1ft (1.54m)
Height (H)	4.5ft (1.37m)
Weight	33.96Klb(15.4mt)




22.05 Klb Counterweight Tray ×1

Length (L)	10.3ft (3.15m)
Width (W)	5.5ft (1.68m)
Height (H)	4.1ft (1.26m)
Weight	22.05Klb (10mt)



17.64 Klb Rear Counterweight A ×2







Length (L)	10.3ft (3.15m)
Width (W)	5.5ft (1.67m)
Height (H)	1.4ft (0.43m)
Weight	17.64Klb (8mt)



5.51 Klb Rear Counterweight B ×4

Length (L)	5.3ft (1.60m)
Width (W)	1.6ft (0.49m)
Height (H)	2.3ft (0.69m)
Weight	5.51Klb (2.5mt)

Transport Dimension



11.02 Klb Carbody Counterweight x2

Length (L)	6.1ft (1.86m)
Width (W)	2.7ft (0.84m)
Height (H)	2.8ft (0.86m)
Weight	11.02Klb (5mt)

143 USt (130mt) Hook Block x1

Length (L)	2.9ft (0.89m)
Width (W)	2.7ft (0.83m)
Height (H)	7.5ft (2.30m)
Weight	5.27Klb (2.39mt)

110 USt (100mt) Hook Block x1

Length (L)	2.8ft (0.85m)
Width (W)	1.9ft (0.58m)
Height (H)	6.7ft (2.05m)
Weight	2.73Klb (1.24mt)

88 USt (80mt) Hook Block x1

Length (L)	2.3ft (0.69m)
Width (W)	2.2ft (0.67m)
Height (H)	6.1ft (1.87m)
Weight	2.29Klb (1.04mt)






33 USt (30mt) Hook Block x1

Length (L)	2.3ft (0.69m)
Width (W)	1.1ft (0.34m)
Height (H)	5.0ft (1.52m)
Weight	0.93Klb (0.42mt)

14 USt (12.5mt) Hook Ball x1

Length (L)	1.4ft (0.43m)
Width (W)	1.4ft (0.43m)
Height (H)	3.1ft (0.94m)
Weight	0.97Klb (0.44mt)

Transport Dimension

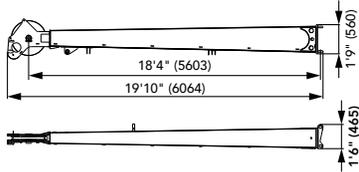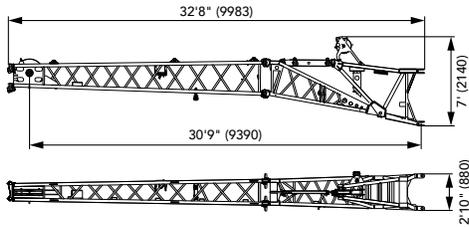

30.8 ft (9.4m) Fixed Jib Base	×1
Length (L)	32.7ft (9.98m)
Width (W)	2.9ft (0.88m)
Height (H)	7ft (2.14m)
Weight	2.38Klb (1.08mt)

20 ft (6.1m) Fixed Jib Tip	×1
Length (L)	19.9ft (6.06m)
Width (W)	1.5ft (0.47m)
Height (H)	1.8ft (0.56m)
Weight	0.93Klb (0.42mt)

Aux. Tip Extension	×1
Length (L)	2.7ft (0.83m)
Width (W)	2ft (0.62m)
Height (H)	1.6ft (0.48m)
Weight	0.24Klb (0.11mt)


9.8 ft (3m) Heavy Duty Jib	×1
Length (L)	11.3ft (3.45m)
Width (W)	3.1ft (0.95m)
Height (H)	10.2ft (3.10m)
Weight	2.16Klb (0.98mt)

Boom Support Bracket	×1
Length (L)	4.8ft (1.47m)
Width (W)	4ft (1.22m)
Height (H)	5.8ft (1.77m)
Weight	0.88Klb (0.40mt)

Transport Plan

■ Transport Dimensions:

Basic Machine (with main & aux. winches, wire rope and aux. lifting sheave, without fly jib): 98.3 Klb (44580kg)

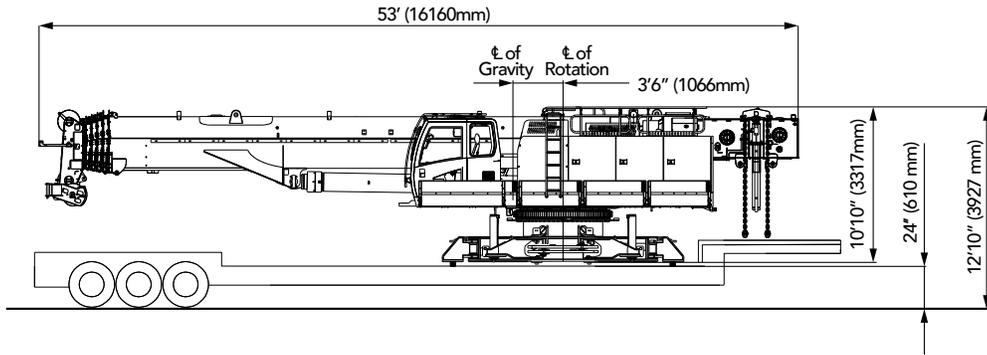

Item	Weight		Dimension (L×W×H)	Trailer				
	lbs	kg		1	2	3	4	5
Basic Machine (with 2 winches, boom, wire rope, aux. nose sheave)	98300	44580	53'×9.8'×10.8'	×				
Left Side Frame	33962	15400	24.2'×5.1'×4.1'		×			
Right Side Frame	33962	15400	24.2'×5.1'×4.1'			×		
Counterweight Tray	22046	10000	10.3'×5.5'×4.1'				×	
Rear Counterweight A - 1 Piece	17637	8000	10.3'×5.5'×1.4'					×
Rear Counterweight A - 1 Piece	17637	8000	10.3'×5.5'×1.4'					×
Rear Counterweight B - 1 Piece	5511	2500	5.3'×1.6'×2.3'				×	
Rear Counterweight B - 1 Piece	5511	2500	5.3'×1.6'×2.3'				×	
Rear Counterweight B - 1 Piece	5511	2500	5.3'×1.6'×2.3'				×	
Rear Counterweight B - 1 Piece	5511	2500	5.3'×1.6'×2.3'				×	
Carbody Counterweight - 1 Piece	11023	5000	6.1'×2.7'×2.8'		×			
Carbody Counterweight - 1 Piece	11023	5000	6.1'×2.7'×2.8'			×		
Bi-fold Fly Jib	3307	1500	32.7'×2.9'×7'					×
Heavy Duty Jib	2160	980	11.3'×3.1'×10.2'					×
Hook Block - 88 USt	2293	1040	2.3'×2.2'×6.1'					×
Hook Block - 14 USt	970	440	1.4'×1.4'×3.1'					×
Total Net Weight On Trailer				98300	44985	44985	44090	44004

Notes:
 Estimated weights vary by ± 2%.
 Loads transported were targeted at 45,000 lbs, 8' 6" wide, 48' long and 13' 6" high from ground, 48' drop deck.
 This may vary depending on truck/trailer weight, style of trailer and state law.