
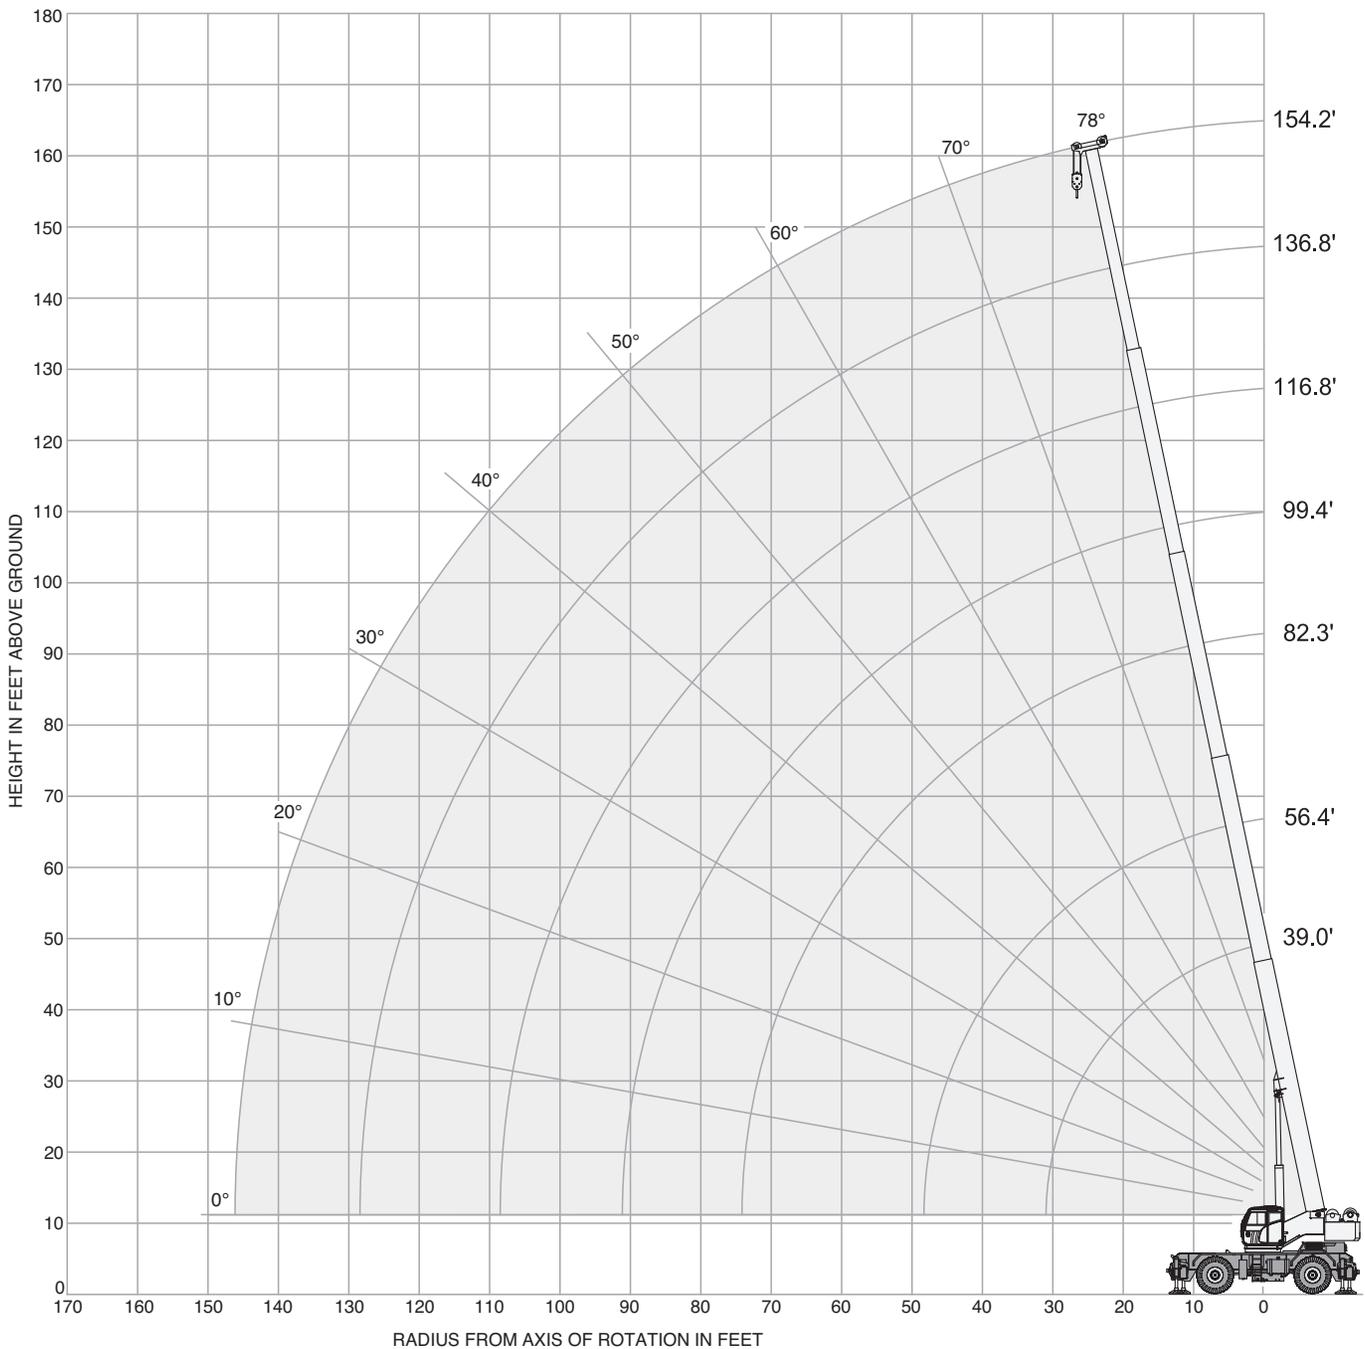


RANGE GRAPH – MAIN BOOM

TRT 100US

DIAGRAMA DE CARGA

**Outriggers - Estabilizadores 100 %
3 Modes**




LOAD CHART – MAIN BOOM US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers · Estabilizadores 100 %

**Mode 1:
Stability · Estabilidad**

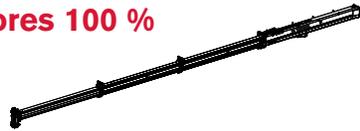

		22,000 lbs		25.6 x 26.2 ft		360°		US STANDARD ASME B30.5						
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
7.5	200.0	-	-	-	-	-	-	-	-	-	-	-	-	7.5
8.2	191.8	-	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	176.4	81.1	80.0	78.0	-	-	-	-	-	-	-	-	-	9.8
11.5	161.4	81.1	80.0	78.0	-	-	-	-	-	-	-	-	-	11.5
13.1	148.6	81.1	80.0	78.0	78.7	-	-	-	-	-	-	-	-	13.1
14.8	137.6	81.1	80.0	78.0	78.7	-	-	-	-	-	-	-	-	14.8
16.4	125.4	81.1	80.0	78.0	78.7	68.3	-	-	-	-	-	-	-	16.4
19.7	100.8	81.1	80.0	78.0	78.7	63.3	54.7	-	-	-	-	-	-	19.7
23.0	83.8	81.1	80.0	78.0	78.7	58.9	49.6	45.2	37.0	-	-	-	-	23.0
26.2	71.2	72.3	72.8	73.2	73.4	55.1	45.2	41.4	36.4	30.0	-	-	-	26.2
29.5	61.7	62.6	63.1	63.5	63.7	51.6	41.4	38.1	33.7	30.0	26.9	-	-	29.5
32.8	-	55.1	55.6	56.0	56.2	48.7	38.4	35.3	31.3	28.4	25.4	21.2	-	32.8
39.4	-	-	41.0	41.4	41.9	42.3	33.3	30.4	26.9	24.5	22.5	21.2	19.6	39.4
45.9	-	-	31.1	31.5	32.0	32.2	28.9	26.7	23.4	21.6	19.6	20.3	19.4	45.9
52.5	-	-	-	24.7	25.1	25.4	25.6	23.4	20.5	19.0	17.2	18.1	16.3	52.5
59.0	-	-	-	-	20.3	20.5	20.7	20.9	18.1	16.5	15.0	16.1	13.9	59.0
65.6	-	-	-	-	-	17.0	17.2	17.4	15.9	14.3	13.2	14.3	11.9	65.6
72.2	-	-	-	-	-	14.1	14.1	14.3	14.3	12.8	11.7	12.8	10.1	72.2
78.7	-	-	-	-	-	-	11.9	11.9	12.1	11.7	10.1	11.2	8.8	78.7
85.3	-	-	-	-	-	-	-	9.9	10.1	10.1	9.0	9.3	7.5	85.3
91.8	-	-	-	-	-	-	-	-	8.4	8.6	7.9	7.7	6.4	91.8
98.4	-	-	-	-	-	-	-	-	7.1	7.3	7.1	6.2	4.9	98.4
105.0	-	-	-	-	-	-	-	-	-	6.0	6.2	5.1	3.7	105.0
111.5	-	-	-	-	-	-	-	-	-	-	5.1	4.0	2.6	111.5
118.1	-	-	-	-	-	-	-	-	-	-	-	3.1	1.8	118.1
124.6	-	-	-	-	-	-	-	-	-	-	-	2.2	-	124.6

LOAD CHART – MAIN BOOM US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers - Estabilizadores 50 %

**Mode 1:
Stability - Estabilidad**



		22,000 lbs		25.6 x 17.4 ft		360°		US STANDARD ASME B30.5							
		39.0 ft	47.9 ft	56.4 ft	64.9 ft	73.5 ft	82.3 ft	90.9 ft	99.4 ft	108.2 ft	116.8 ft	125.3 ft	136.8 ft	154.2 ft	
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	175.7	-	-	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	157.4	81.1	80.0	78.0	-	-	-	-	-	-	-	-	-	-	9.8
11.5	142.6	81.1	80.0	78.0	-	-	-	-	-	-	-	-	-	-	11.5
13.1	130.1	81.1	80.0	78.0	78.7	-	-	-	-	-	-	-	-	-	13.1
14.8	115.3	81.1	80.0	78.0	78.7	-	-	-	-	-	-	-	-	-	14.8
16.4	97.4	81.1	80.0	78.0	78.3	68.3	-	-	-	-	-	-	-	-	16.4
19.7	67.2	69.0	67.0	64.4	61.7	59.3	54.7	-	-	-	-	-	-	-	19.7
23.0	49.8	51.1	52.0	52.2	50.5	48.7	47.2	45.2	37.0	-	-	-	-	-	23.0
26.2	38.8	40.1	40.8	41.2	41.7	41.0	39.7	38.6	36.4	30.0	-	-	-	-	26.2
29.5	31.3	32.4	33.1	33.5	34.0	34.2	34.2	33.3	32.4	30.0	26.9	-	-	-	29.5
32.8	-	26.9	27.6	28.0	28.2	28.4	28.9	28.9	28.2	27.6	25.4	21.2	-	-	32.8
39.4	-	-	19.8	20.3	20.5	20.7	20.9	21.2	21.4	21.6	21.2	19.2	17.0	-	39.4
45.9	-	-	15.0	15.4	15.7	15.9	16.1	16.3	16.3	16.5	16.5	15.2	13.2	13.2	45.9
52.5	-	-	-	11.9	12.1	12.3	12.6	12.8	12.8	13.0	13.0	12.1	10.1	-	52.5
59.0	-	-	-	-	9.7	9.7	9.9	10.1	10.1	10.4	10.6	9.7	7.9	-	59.0
65.6	-	-	-	-	-	7.7	7.9	8.2	8.2	8.4	8.4	7.7	6.2	-	65.6
72.2	-	-	-	-	-	6.4	6.4	6.6	6.6	6.8	6.8	6.2	4.6	-	72.2
78.7	-	-	-	-	-	-	5.3	5.3	5.3	5.5	5.5	4.9	3.3	-	78.7
85.3	-	-	-	-	-	-	-	4.2	4.4	4.4	4.4	3.5	2.2	-	85.3
91.8	-	-	-	-	-	-	-	-	3.3	3.5	3.5	2.6	-	-	91.8
98.4	-	-	-	-	-	-	-	-	2.4	2.4	2.6	1.8	-	-	98.4
105.0	-	-	-	-	-	-	-	-	-	1.8	1.8	-	-	-	105.0

Outriggers - Estabilizadores 0 %

		22,000 lbs		25.6 x 8.9 ft		360°		US STANDARD ASME B30.5							
		39.0 ft	47.9 ft	56.4 ft	64.9 ft	73.5 ft	82.3 ft	90.9 ft	99.4 ft	108.2 ft	116.8 ft	125.3 ft	136.8 ft	148.6 ft	
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	94.1	-	-	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	75.6	70.3	65.9	61.9	-	-	-	-	-	-	-	-	-	-	9.8
11.5	62.4	58.9	55.8	52.9	-	-	-	-	-	-	-	-	-	-	11.5
13.1	51.8	50.3	47.8	45.6	43.7	-	-	-	-	-	-	-	-	-	13.1
14.8	42.3	43.4	41.7	40.1	38.4	-	-	-	-	-	-	-	-	-	14.8
16.4	35.3	36.6	36.6	35.5	34.2	32.8	-	-	-	-	-	-	-	-	16.4
19.7	25.8	26.9	27.6	28.0	27.3	26.5	25.6	-	-	-	-	-	-	-	19.7
23.0	19.8	20.7	21.4	21.8	22.0	21.8	21.2	20.5	20.1	-	-	-	-	-	23.0
26.2	15.7	16.5	17.0	17.4	17.6	17.9	17.6	17.2	16.8	16.3	-	-	-	-	26.2
29.5	12.6	13.2	13.9	14.1	14.6	14.6	15.0	14.6	14.3	13.9	13.7	-	-	-	29.5
32.8	-	10.8	11.2	11.7	11.9	12.1	12.3	12.3	12.1	11.9	11.7	9.9	-	-	32.8
39.4	-	-	7.7	8.2	8.4	8.6	8.8	8.8	8.8	8.6	8.4	7.1	5.7	-	39.4
45.9	-	-	5.5	5.7	6.0	6.2	6.2	6.4	6.4	6.2	6.2	4.9	3.7	-	45.9
52.5	-	-	-	4.0	4.2	4.2	4.4	4.6	4.4	4.4	4.4	3.1	2.0	-	52.5
59.0	-	-	-	-	2.6	2.9	3.1	3.1	3.1	2.9	2.9	1.8	-	-	59.0
65.6	-	-	-	-	-	1.5	1.8	1.8	1.8	1.8	1.8	-	-	-	65.6

LOAD CHART – MAIN BOOM US STANDARD ASME B30.5


TRT 100US

TABLA DE CARGA

Outriggers · Estabilizadores 100 %

Mode 2:

Strength · Fuerza

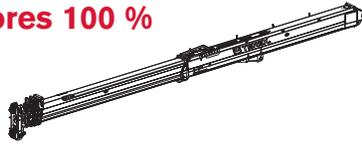

		22,000 lbs		25.6 x 26.2 ft		360°		US STANDARD ASME B30.5							
		39.0 ft	50.5 ft	62.0 ft	72.2 ft	80.7 ft	89.5 ft	98.1 ft	106.6 ft	115.5 ft	124.0 ft	132.5 ft	141.4 ft	154.2 ft	
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
7.5	200.0	-	-	-	-	-	-	-	-	-	-	-	-	-	7.5
8.2	191.8	-	-	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	176.4	167.3	102.3	-	-	-	-	-	-	-	-	-	-	-	9.8
11.5	161.4	154.5	93.9	-	-	-	-	-	-	-	-	-	-	-	11.5
13.1	148.6	143.7	86.2	76.3	-	-	-	-	-	-	-	-	-	-	13.1
14.8	137.6	134.5	80.0	71.0	68.6	-	-	-	-	-	-	-	-	-	14.8
16.4	125.4	123.5	74.1	66.6	63.7	-	-	-	-	-	-	-	-	-	16.4
19.7	100.8	99.0	65.5	57.5	55.6	53.8	-	-	-	-	-	-	-	-	19.7
23.0	83.8	81.8	57.8	50.7	48.9	47.4	45.6	43.7	-	-	-	-	-	-	23.0
26.2	71.2	69.4	52.0	45.2	43.7	42.3	40.6	38.8	37.7	-	-	-	-	-	26.2
29.5	61.7	60.0	46.7	40.8	39.0	37.9	36.6	35.1	34.0	32.2	-	-	-	-	29.5
32.8	-	52.2	42.5	36.6	35.5	34.2	33.3	31.5	30.6	29.8	25.8	-	-	-	32.8
39.4	-	36.4	35.1	30.2	29.3	28.7	27.6	26.2	25.4	24.7	24.3	23.8	19.6	-	39.4
45.9	-	-	25.6	25.4	24.7	24.3	23.4	22.3	21.4	20.5	20.1	19.8	19.4	-	45.9
52.5	-	-	19.2	19.2	20.1	20.7	19.8	19.0	18.1	17.4	17.2	16.8	16.3	-	52.5
59.0	-	-	-	14.3	15.2	16.1	16.8	16.1	15.7	15.0	14.6	14.3	13.9	-	59.0
65.6	-	-	-	-	11.7	12.3	13.0	13.4	13.4	12.8	12.6	12.3	11.9	-	65.6
72.2	-	-	-	-	8.8	9.5	10.1	10.6	11.0	11.0	10.8	10.6	10.1	-	72.2
78.7	-	-	-	-	-	7.3	7.7	8.2	8.6	9.0	9.3	9.0	8.8	-	78.7
85.3	-	-	-	-	-	-	6.0	6.4	6.6	7.1	7.5	7.7	7.5	-	85.3
91.8	-	-	-	-	-	-	-	4.9	5.1	5.5	5.7	6.0	6.4	-	91.8
98.4	-	-	-	-	-	-	-	3.5	3.7	4.2	4.4	4.6	4.9	-	98.4
105.0	-	-	-	-	-	-	-	-	2.6	2.9	3.3	3.5	3.7	-	105.0
111.5	-	-	-	-	-	-	-	-	-	2.0	2.2	2.4	2.6	-	111.5
118.1	-	-	-	-	-	-	-	-	-	-	-	-	1.8	-	118.1


LOAD CHART – MAIN BOOM US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers - Estabilizadores 50 %

**Mode 2:
Strength - Fuerza**

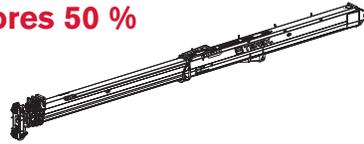

		22,000 lbs		25.6 x 17.4 ft		360°		US STANDARD ASME B30.5						
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	175.7	-	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	157.4	156.1	102.3	-	-	-	-	-	-	-	-	-	-	9.8
11.5	142.6	141.1	93.9	-	-	-	-	-	-	-	-	-	-	11.5
13.1	130.1	119.5	86.2	76.3	-	-	-	-	-	-	-	-	-	13.1
14.8	115.3	99.4	80.0	71.0	68.6	-	-	-	-	-	-	-	-	14.8
16.4	97.4	84.7	74.1	66.6	63.7	-	-	-	-	-	-	-	-	16.4
19.7	67.2	64.2	57.5	54.0	52.5	50.9	-	-	-	-	-	-	-	19.7
23.0	49.8	47.4	45.6	43.0	42.3	41.4	40.3	39.5	-	-	-	-	-	23.0
26.2	38.8	36.6	35.5	35.1	34.8	34.2	33.7	33.1	32.4	-	-	-	-	26.2
29.5	31.3	29.3	28.2	28.4	29.1	28.7	28.4	28.0	27.6	27.1	-	-	-	29.5
32.8	-	24.0	22.9	23.1	23.8	24.5	24.3	24.0	23.6	23.4	22.9	-	-	32.8
39.4	-	16.8	15.7	15.9	16.5	17.2	17.6	17.9	17.9	17.6	17.4	17.2	17.0	39.4
45.9	-	-	11.0	11.2	11.9	12.3	12.8	13.4	13.4	13.4	13.4	13.2	13.2	45.9
52.5	-	-	7.9	7.9	8.6	9.0	9.5	9.9	10.4	10.4	10.4	10.4	10.1	52.5
59.0	-	-	-	5.3	6.2	6.6	7.1	7.5	7.7	7.9	7.9	7.9	7.9	59.0
65.6	-	-	-	-	4.0	4.4	5.1	5.5	5.7	6.0	6.0	6.0	6.2	65.6
72.2	-	-	-	-	2.2	2.6	3.3	3.7	4.0	4.2	4.4	4.4	4.6	72.2
78.7	-	-	-	-	-	-	1.8	2.2	2.6	2.9	3.1	3.1	3.3	78.7
85.3	-	-	-	-	-	-	-	-	-	1.8	1.8	2.0	2.2	85.3

Outriggers - Estabilizadores 0 %

		22,000 lbs		25.6 x 8.9 ft		360°		US STANDARD ASME B30.5					
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	94.1	-	-	-	-	-	-	-	-	-	-	-	8.2
9.8	75.6	64.2	55.6	-	-	-	-	-	-	-	-	-	9.8
11.5	62.4	53.4	46.5	-	-	-	-	-	-	-	-	-	11.5
13.1	51.8	45.2	39.5	36.6	-	-	-	-	-	-	-	-	13.1
14.8	42.3	38.8	34.0	31.5	30.9	-	-	-	-	-	-	-	14.8
16.4	35.3	33.3	29.3	27.3	26.9	-	-	-	-	-	-	-	16.4
19.7	25.8	24.0	22.5	20.9	20.9	20.5	-	-	-	-	-	-	19.7
23.0	19.8	18.1	17.2	16.1	16.3	16.3	16.1	15.9	-	-	-	-	23.0
26.2	15.7	13.9	13.0	12.6	12.8	13.0	13.0	12.8	12.8	-	-	-	26.2
29.5	12.6	10.8	10.1	9.7	9.9	10.1	10.4	10.4	10.4	10.1	-	-	29.5
32.8	-	8.6	7.7	7.3	7.7	7.9	8.2	8.4	8.4	8.4	8.2	-	32.8
39.4	-	5.3	4.0	3.7	4.2	4.6	4.9	5.1	5.3	5.3	5.3	5.3	39.4
45.9	-	-	-	-	1.8	2.2	2.4	2.6	2.9	3.1	3.1	3.1	45.9

LOAD CHART – MAIN BOOM US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers · Estabilizadores 50 %

Mode 3:

Proportional · Proporcional



		22,000 lbs		25.6 x 17.4 ft		360°		US STANDARD ASME B30.5				
	39.0 ft	50.5 ft	62.0 ft	73.5 ft	85.3 ft	96.8 ft	108.2 ft	119.7 ft	131.2 ft	142.7 ft	154.2 ft	
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	175.7	-	-	-	-	-	-	-	-	-	-	8.2
9.8	157.4	80.5	77.8	-	-	-	-	-	-	-	-	9.8
11.5	142.6	80.5	77.8	-	-	-	-	-	-	-	-	11.5
13.1	130.1	80.5	77.8	76.1	-	-	-	-	-	-	-	13.1
14.8	115.3	80.5	77.8	76.1	-	-	-	-	-	-	-	14.8
16.4	97.4	80.5	77.8	75.6	70.1	-	-	-	-	-	-	16.4
19.7	67.2	67.9	63.3	59.3	55.8	52.7	-	-	-	-	-	19.7
23.0	49.8	50.5	50.9	48.3	45.6	43.4	41.2	-	-	-	-	23.0
26.2	38.8	39.5	39.7	39.9	38.1	36.4	34.8	33.1	-	-	-	26.2
29.5	31.3	32.0	32.2	32.4	32.4	31.1	29.8	28.4	-	-	-	29.5
32.8	-	26.5	26.7	26.7	26.9	26.7	25.6	24.7	23.8	-	-	32.8
39.4	-	19.0	19.0	19.2	19.2	19.4	19.4	18.7	18.1	17.4	17.0	39.4
45.9	-	-	14.1	14.3	14.3	14.6	14.6	14.6	14.1	13.7	13.2	45.9
52.5	-	-	10.8	11.0	11.0	11.0	11.2	11.2	11.0	10.6	10.1	52.5
59.0	-	-	-	8.4	8.4	8.6	8.6	8.8	8.6	8.2	7.9	59.0
65.6	-	-	-	-	6.6	6.6	6.6	6.8	6.6	6.4	6.2	65.6
72.2	-	-	-	-	5.1	5.1	5.1	5.1	4.9	4.6	4.6	72.2
78.7	-	-	-	-	-	3.5	3.5	3.7	3.5	3.3	3.3	78.7
85.3	-	-	-	-	-	2.4	2.4	2.4	2.4	2.2	2.2	85.3

Outriggers · Estabilizadores 0 %



		22,000 lbs		24.9 ft x 8.9 ft		360°		US STANDARD ASME B30.5			
	39.0 ft	50.5 ft	62.0 ft	73.5 ft	85.3 ft	96.8 ft	108.2 ft	119.7 ft	131.2 ft	148.6 ft	
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
8.2	94.1	-	-	-	-	-	-	-	-	-	8.2
9.8	75.6	67.9	61.5	-	-	-	-	-	-	-	9.8
11.5	62.4	56.9	52.0	-	-	-	-	-	-	-	11.5
13.1	51.8	48.5	44.8	41.4	-	-	-	-	-	-	13.1
14.8	42.3	41.9	39.0	36.4	-	-	-	-	-	-	14.8
16.4	35.3	35.9	34.2	32.2	30.0	-	-	-	-	-	16.4
19.7	25.8	26.5	26.7	25.6	24.0	22.7	-	-	-	-	19.7
23.0	19.8	20.3	20.5	20.5	19.4	18.5	17.6	-	-	-	23.0
26.2	15.7	16.1	16.3	16.3	15.9	15.2	14.3	13.7	-	-	26.2
29.5	12.6	12.8	13.0	13.2	13.2	12.6	11.9	11.2	-	-	29.5
32.8	-	10.4	10.6	10.8	10.8	10.4	9.9	9.3	8.8	-	32.8
39.4	-	7.1	7.1	7.3	7.3	7.1	6.6	6.2	6.0	5.5	39.4
45.9	-	-	4.9	4.9	4.6	4.4	4.2	4.0	3.7	3.3	45.9
52.5	-	-	2.9	2.9	2.6	2.4	2.4	2.2	2.0	1.5	52.5

RANGE GRAPH - JIB

TRT 100US

DIAGRAMA DE CARGA

55.8 ft offset - angulamiento

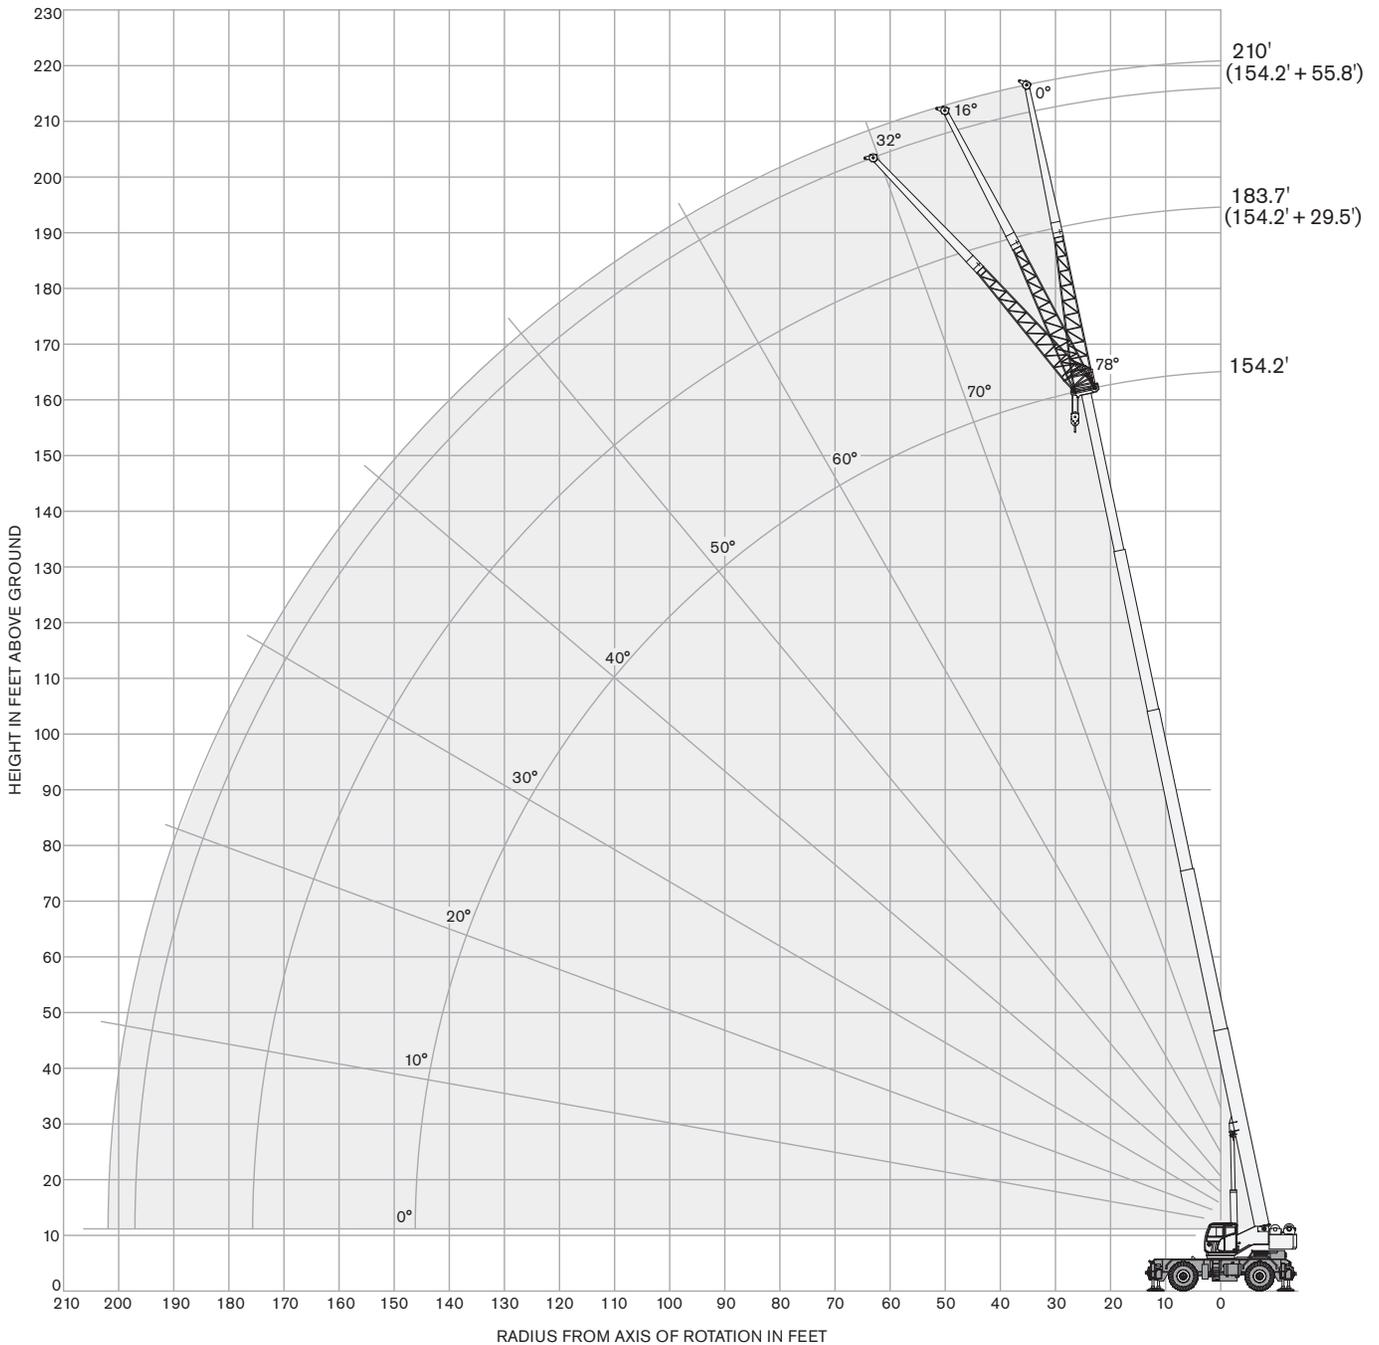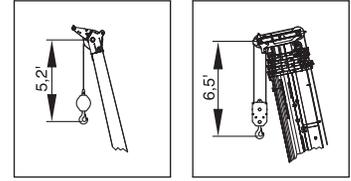

LOAD CHART – JIB US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers · Estabilizadores 100 %

Mode 3:

Proportional · Proporcional



  22,000 lbs		 25.6 x 26.2 ft		 360°		US STANDARD ASME B30.5				
	 125.3 ft		 29.5 ft		 154.2 ft		 29.5 ft			
	0°	16°	32°	0°	16°	32°	0°	16°		32°
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
39.4	18.7	-	-	-	-	-	-	-	-	39.4
45.9	18.7	16.3	-	-	-	-	-	-	-	45.9
52.5	18.3	15.7	13.7	-	11.0	-	-	-	-	52.5
59.0	16.8	15.0	13.2	-	11.0	11.0	-	-	-	59.0
65.6	14.8	14.6	13.0	-	11.0	10.4	9.5	-	-	65.6
72.2	12.8	13.7	12.8	-	10.1	9.5	8.8	-	-	72.2
78.7	10.4	11.5	12.3	-	8.8	8.8	8.2	-	-	78.7
85.3	8.4	9.5	10.1	-	7.5	7.9	7.7	-	-	85.3
91.8	6.8	7.5	8.2	-	6.2	7.1	7.1	-	-	91.8
98.4	5.3	6.2	6.6	-	4.9	5.5	6.4	-	-	98.4
105.0	4.2	4.9	5.3	-	3.5	4.4	4.9	-	-	105.0
111.5	3.1	3.7	4.2	-	2.4	3.3	3.7	-	-	111.5
118.1	2.2	2.6	3.1	-	1.5	2.2	2.6	-	-	118.1
124.6	-	1.8	2.0	-	-	-	1.8	-	-	124.6

  22,000 lbs		 25.6 x 26.2 ft		 360°		US STANDARD ASME B30.5				
	 125.3 ft		 55.8 ft		 154.2 ft		 55.8 ft			
	0°	16°	32°	0°	16°	32°	0°	16°		32°
ft	kip	kip	kip	kip	kip	kip	kip	kip	kip	ft
45.9	8.8	-	-	-	-	-	-	-	-	45.9
52.5	8.6	-	-	-	-	-	-	-	-	52.5
59.0	7.9	6.4	-	-	6.8	-	-	-	-	59.0
65.6	7.7	6.2	-	-	6.8	-	-	-	-	65.6
72.2	7.3	5.7	4.9	-	6.8	5.5	-	-	-	72.2
78.7	6.8	5.5	4.6	-	6.6	5.5	-	-	-	78.7
85.3	6.6	5.5	4.6	-	6.4	5.3	4.6	-	-	85.3
91.8	6.2	5.1	4.4	-	6.2	5.3	4.4	-	-	91.8
98.4	6.0	5.1	4.2	-	5.1	5.1	4.4	-	-	98.4
105.0	5.3	4.9	4.2	-	4.0	4.9	4.4	-	-	105.0
111.5	4.2	4.6	4.2	-	3.1	4.4	4.2	-	-	111.5
118.1	3.3	4.2	4.2	-	2.2	3.5	4.2	-	-	118.1
124.6	2.4	3.3	4.0	-	1.5	2.6	3.5	-	-	124.6
131.2	1.8	2.4	3.1	-	-	1.8	2.6	-	-	131.2
137.8	-	1.8	2.2	-	-	-	1.8	-	-	137.8

LOAD CHART – JIB US STANDARD ASME B30.5

TRT 100US

TABLA DE CARGA

Outriggers · Estabilizadores 50 %

Mode 3:

Proportional · Proporcional



  22,000 lbs		 25.6 x 17.4 ft		 360°		US STANDARD ASME B30.5				
 ft	 125.3 ft		 29.5 ft		 154.2 ft		 29.5 ft		 ft	
	0°	16°	32°	0°	16°	32°	0°	16°		32°
	kip	kip	kip	kip	kip	kip	kip	kip	kip	
39.4	17.2	-	-	-	-	-	-	-	-	39.4
45.9	13.4	15.0	-	-	-	-	-	-	-	45.9
52.5	10.6	11.9	13.2	-	9.0	-	-	-	-	52.5
59.0	8.2	9.5	10.6	-	6.8	8.2	-	-	-	59.0
65.6	6.4	7.5	8.4	-	5.1	6.4	7.3	-	-	65.6
72.2	4.9	5.7	6.6	-	3.7	4.9	5.7	-	-	72.2
78.7	3.5	4.4	5.1	-	2.4	3.5	4.2	-	-	78.7
85.3	2.4	3.1	3.7	-	-	2.4	3.1	-	-	85.3
91.8	-	2.2	2.6	-	-	-	2.0	-	-	91.8
98.4	-	-	1.8	-	-	-	-	-	-	98.4

  22,000 lbs		 25.6 x 17.4 ft		 360°		US STANDARD ASME B30.5				
 ft	 125.3 ft		 55.8 ft		 154.2 ft		 55.8 ft		 ft	
	0°	16°	32°	0°	16°	32°	0°	16°		32°
	kip	kip	kip	kip	kip	kip	kip	kip	kip	
45.9	8.8	-	-	-	-	-	-	-	-	45.9
52.5	8.6	-	-	-	-	-	-	-	-	52.5
59.0	7.9	6.4	-	-	6.8	-	-	-	-	59.0
65.6	6.8	6.2	-	-	5.5	-	-	-	-	65.6
72.2	5.5	5.7	4.9	-	4.2	5.5	-	-	-	72.2
78.7	4.2	5.5	4.6	-	2.9	4.6	-	-	-	78.7
85.3	3.1	4.4	4.6	-	2.0	3.5	4.6	-	-	85.3
91.8	2.2	3.5	4.4	-	-	2.4	3.7	-	-	91.8
98.4	-	2.4	3.5	-	-	1.5	2.6	-	-	98.4
105.0	-	1.8	2.6	-	-	-	1.8	-	-	105.0
111.5	-	-	1.8	-	-	-	-	-	-	111.5