


RANGE GRAPH – MAIN BOOM

TRT 40US

DIAGRAMA DE CARGA




Main boom with hook block:
Extension with hook ball:

5.25 ft
2.30 ft

Pluma principal con gancho:
Extensión con aparejo de gancho:

5.25 ft
2.30 ft

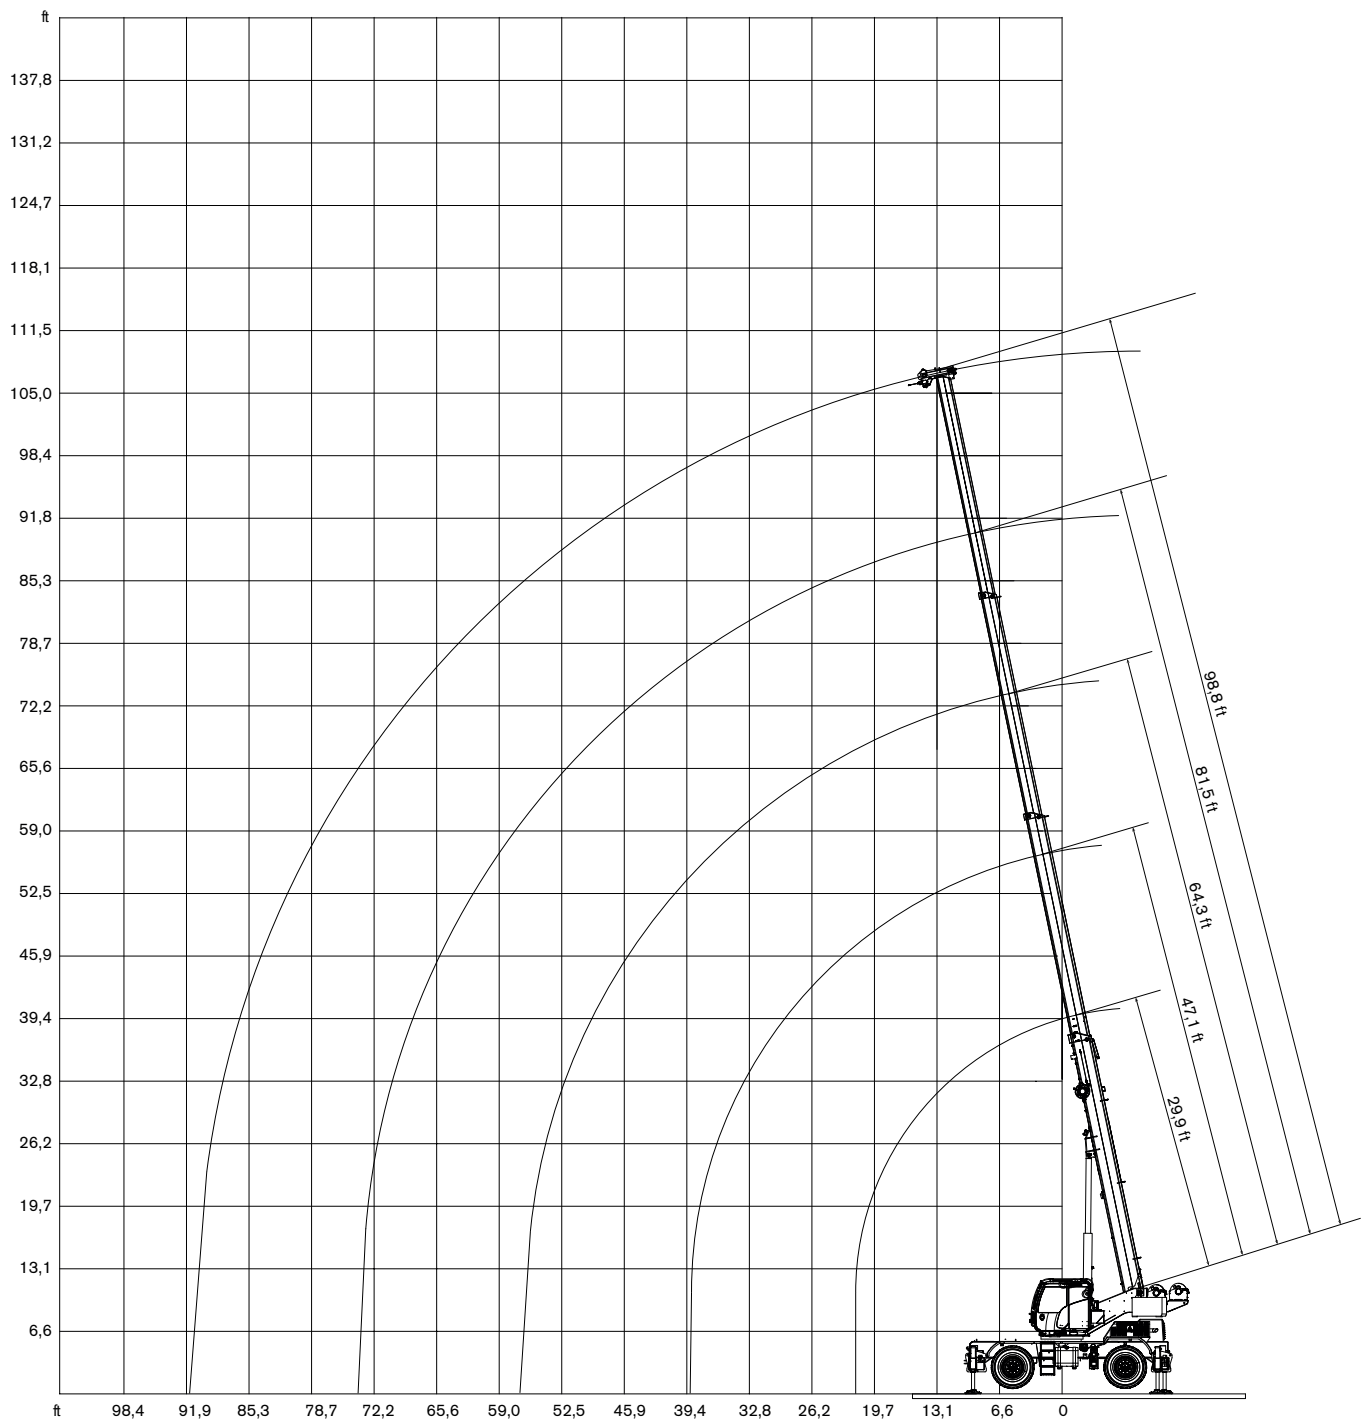

LOAD CHART – MAIN BOOM

US STANDARD ASME B30.5

TRT 40US

TABLA DE CARGA

Outriggers · Estabilizadores 100 %

  9,260 lbs  19.4 ft x 19.0 ft  360° US STANDARD ASME B30.5						
	29.9 ft	47.1 ft	64.3 ft	81.5 ft	98.8 ft	
ft	kip	kip	kip	kip	kip	ft
8,0	80,00	-	-	-	-	8,0
9,8	77,16	47,84	35,49	-	-	9,8
11,5	68,34	45,75	33,07	28,44	-	11,5
13,1	62,61	43,87	30,97	26,57	-	13,1
14,8	56,22	42,22	29,10	24,91	11,02	14,8
16,4	50,71	40,67	27,45	23,37	11,02	16,4
19,7	35,82	34,28	24,25	20,72	11,02	19,7
23,0	-	26,68	21,61	18,41	11,02	23,0
26,2	-	20,83	19,51	16,53	11,02	26,2
29,5	-	16,75	16,31	14,99	11,02	29,5
32,8	-	13,78	13,89	13,67	11,02	32,8
36,1	-	11,57	11,68	11,35	10,58	36,1
39,4	-	-	9,92	9,92	9,92	39,4
42,7	-	-	8,49	8,38	8,16	42,7
45,9	-	-	7,28	7,28	7,28	45,9
49,2	-	-	6,39	6,28	6,28	49,2
52,5	-	-	5,40	5,51	5,51	52,5
55,8	-	-	4,74	4,74	4,85	55,8
59,1	-	-	-	4,19	4,19	59,1
62,3	-	-	-	3,64	3,64	62,3
65,6	-	-	-	3,09	3,20	65,6
68,9	-	-	-	2,65	2,76	68,9
72,2	-	-	-	2,31	2,31	72,2
75,5	-	-	-	-	1,98	75,5
78,7	-	-	-	-	1,65	78,7
82,0	-	-	-	-	1,43	82,0
85,3	-	-	-	-	1,10	85,3
88,6	-	-	-	-	0,88	88,6
91,9	-	-	-	-	-	91,9

LOAD CHART – MAIN BOOM

US STANDARD ASME B30.5

TRT 40US

TABLA DE CARGA

Outriggers · Estabilizadores 50 %

  9,260 lbs  19.4 ft x 10.10 ft  360° US STANDARD ASME B30.5						
	29.9 ft	47.1 ft	64.3 ft	81.5 ft	98.8 ft	
ft	kip	kip	kip	kip	kip	ft
9,8	68,12	47,84	35,49	-	-	9,8
11,5	48,39	45,75	33,07	28,44	-	11,5
13,1	37,26	37,59	30,97	26,57	-	13,1
14,8	29,65	29,87	29,10	24,91	11,02	14,8
16,4	24,47	24,69	23,92	23,37	11,02	16,4
19,7	17,75	17,97	17,97	18,08	11,02	19,7
23,0	-	13,67	13,78	13,78	11,02	23,0
26,2	-	10,80	10,80	10,91	10,91	26,2
29,5	-	8,60	8,71	8,71	8,71	29,5
32,8	-	7,05	7,16	7,16	7,16	32,8
36,1	-	5,73	5,84	5,84	5,84	36,1
39,4	-	-	4,74	4,74	4,74	39,4
42,7	-	-	3,97	3,97	3,97	42,7
45,9	-	-	3,20	3,20	3,20	45,9
49,2	-	-	2,65	2,65	2,65	49,2
52,5	-	-	2,09	2,09	2,09	52,5
55,8	-	-	1,65	1,65	1,76	55,8
59,1	-	-	-	1,32	1,32	59,1
62,3	-	-	-	0,88	0,88	62,3
65,6	-	-	-	0,55	0,55	65,6
68,9	-	-	-	-	-	68,9

LOAD CHART – MAIN BOOM

US STANDARD ASME B30.5

TRT 40US

TABLA DE CARGA

On Tires · Sobre neumáticos


  9,260 lbs  360°  0 mph US STANDARD ASME B30.5					
	29.9 ft	47.1 ft	64.3 ft	81.5 ft	
 ft	kip	kip	kip	kip	 ft
6,6	26,01	-	-	-	6,6
8,2	26,01	-	-	-	8,2
9,8	26,01	-	-	-	9,8
11,5	22,49	-	-	-	11,5
13,1	19,62	-	-	-	13,1
14,8	17,20	17,42	-	-	14,8
16,4	14,77	14,99	-	-	16,4
19,7	10,80	10,14	-	-	19,7
23,0	-	8,38	7,72	-	23,0
26,2	-	6,39	6,39	-	26,2
29,5	-	4,85	5,07	5,07	29,5
32,8	-	3,75	3,97	3,97	32,8
36,1	-	2,87	3,09	3,09	36,1
39,4	-	-	2,20	2,20	39,4
42,7	-	-	1,76	1,76	42,7
45,9	-	-	1,10	1,10	45,9
49,2	-	-	0,66	0,66	49,2
52,5	-	-	0,44	0,44	52,5
55,8	-	-	-	-	55,8

  9,260 lbs  0°  1.2 mph US STANDARD ASME B30.5					
	29.9 ft	47.1 ft	64.3 ft		
 ft	kip	kip	kip		 ft
9,8	26,23	26,23	26,46		9,8
11,5	23,15	23,15	23,37		11,5
13,1	20,50	20,72	20,72		13,1
14,8	18,52	18,52	18,52		14,8
16,4	16,53	16,75	16,75		16,4
19,7	13,67	13,89	13,89		19,7
23,0	-	11,46	11,46		23,0
26,2	-	9,48	9,70		26,2
29,5	-	7,72	7,72		29,5
32,8	-	6,17	6,17		32,8
36,1	-	5,07	5,07		36,1
39,4	-	-	3,97		39,4
42,7	-	-	3,31		42,7
45,9	-	-	2,65		45,9
49,2	-	-	1,98		49,2
52,5	-	-	1,54		52,5
55,8	-	-	1,10		55,8

RANGE GRAPH – JIB

TRT 40US

DIAGRAMA DE CARGA




Main boom with hook block:
Extension with hook ball:

5.25 ft
2.30 ft

Pluma principal con gancho:
Extensión con aparejo de gancho:

5.25 ft
2.30 ft

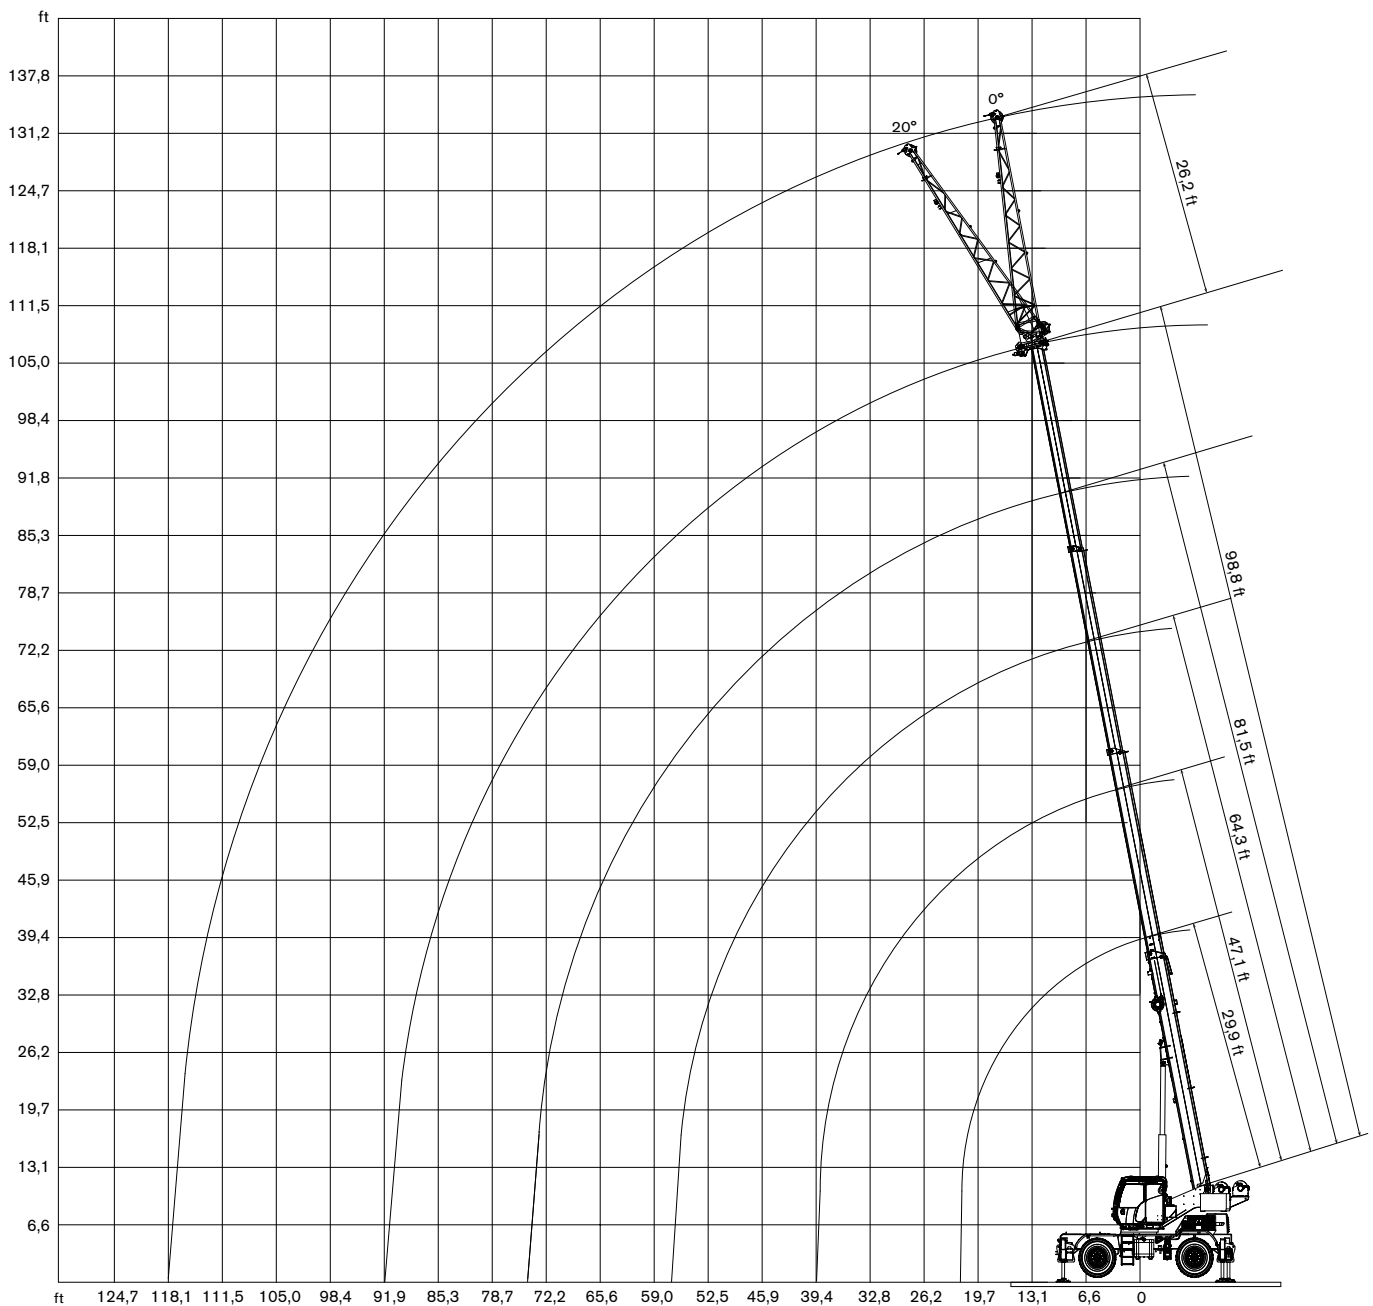

LOAD CHART – JIB US STANDARD ASME B30.5

TRT 40US

TABLA DE CARGA

Outriggers · Estabilizadores 100 %

  9,260 lbs		 19.4 ft x 19.0 ft		 360°		US STANDARD ASME B30.5	
	 98.8 ft  26.2 ft						
ft	0°	20°	ft				
	kip	kip					
19,7	9,84	-	19,7				
23,0	9,84	-	23,0				
26,2	9,84	-	26,2				
29,5	9,84	6,89	29,5				
32,8	9,84	6,89	32,8				
36,1	9,84	6,89	36,1				
39,4	9,84	6,89	39,4				
42,7	9,84	6,89	42,7				
45,9	9,19	6,73	45,9				
49,2	8,69	6,56	49,2				
52,5	8,20	6,40	52,5				
55,8	7,71	6,23	55,8				
59,1	7,22	6,07	59,1				
62,3	5,91	5,91	62,3				
65,6	5,09	5,74	65,6				
68,9	4,43	5,09	68,9				
72,2	3,94	4,59	72,2				
75,5	3,44	3,94	75,5				
78,7	2,79	3,44	78,7				
82,0	2,46	2,95	82,0				
85,3	2,13	2,46	85,3				
88,6	1,80	2,13	88,6				
91,9	1,31	1,80	91,9				
95,1	1,15	1,31	95,1				
98,4	0,82	0,98	98,4				
101,7	0,49	0,82	101,7				
105,0	-	0,49	105,0				