



SUPER S


SUPER S	
ENGINE	
Manufacturer	Kawasaki FS, FT & FX series
HP	36" deck: 15HP - FS541, 19HP - FX600 48" deck: 22HP - FX691 52" deck: 22HP - FT691 52", 60" deck: 27HP - FX850, 29.5HP - FX850 EFI (Per SAE J1995)
Displacement	603cc - 852cc
Cooling	Air cooled
Air Cleaner	FX: Heavy duty air canister FS: Oval FT: Vortical
Engine Warranty	3 year
DRIVE SYSTEM	
Type	Dual hydrostatic
Pumps	36" deck: Hydro-Gear 10cc 48", 52", 60" deck: Hydro-Gear 12cc
Wheel Motors	36" deck: Parker TL 48", 52", 60" deck: Parker TL
Speed	36": Up to 8 mph. 48", 52", 60": Up to 9 mph.
Parking Brakes	Hand operated drum brakes
DECKS	
Cutting Width	Side discharge: 36", 48", 52", 60"
Cutting Heights	1.5"-5.5"
Deck Lift	Hand operated.
Depth	5.5"
Blades	36": 2 48", 52", 60": 3
Blade Length	36" deck: 17.86" 48" deck: 16.50" 52" deck: 17.86" 60" deck: 20.50"
Blade Tip Speed	36": 18,700 48": 18,500 52": 17,700 60": 18,400
Spindles	Ductile cast iron with steel shafts and sealed ball bearings
Drive	Electric PTO clutch
Construction	7 ga. Fabricated w/ 7 ga. wrappers
Spindle Mounts	36": 7ga. with 11 ga. doubler 48", 52", 60": 7 ga. with 7 ga. doubler
Impact/Trim Areas	11 ga. formed channel with rolled edge
CONSTRUCTION	
Frame	36": 1.5" x 2" steel tubing 48" 52" 60": 1.5" x 3" steel tubing
Engine Plate	7 ga. with 11 ga. jackshaft doubler
Operator Platform	7 ga. with embossed tread pattern
Front Axle	Fabricated with tapered roller bearings
Front Caster Wheels	Tapered wheel bearings and debris cap
Front Caster Forks	Fabricated 3/8" steel
Operator Pad	Bolstered operator pad
GENERAL	
Fuel Capacity	36": 6.5 gallons 48", 52", 60": 7.3 gallons
Front Tire	36" 11 x 4 - 5 48", 52": 13 x 5 - 6 60": 13 x 6.5 - 6
Drive Tire	36": 20 x 8 - 10 48", 52": 24 x 9.5 - 12 60": 24 x 12 - 12
DIMENSIONS	
Weight	36": 907 lbs 48": 1144 lbs 52": 1153 - 1182 lbs 60": 1207 - 1232 lbs
Height	47"
Length	36": 63.5" 48", 52": 68" 60": 70.75"
Width w/Chute Up	36": 39" 48": 49.3" 52": 52.8" 60": 61.7"
Tire Width	36": 36.3" 48", 52": 45.8" 60": 49"
Trim Side	36": 0" 48": 1.5" 52": 3.5" 60": 5.6"
PRODUCTIVITY*	
Acres Per Hour	36": 2.33 48": 3.49 52": 3.79 60": 4.36

AVAILABLE DECK SIZES
36" - 60"



* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain. ** Specifications are subject to change without notice.

SUPER S

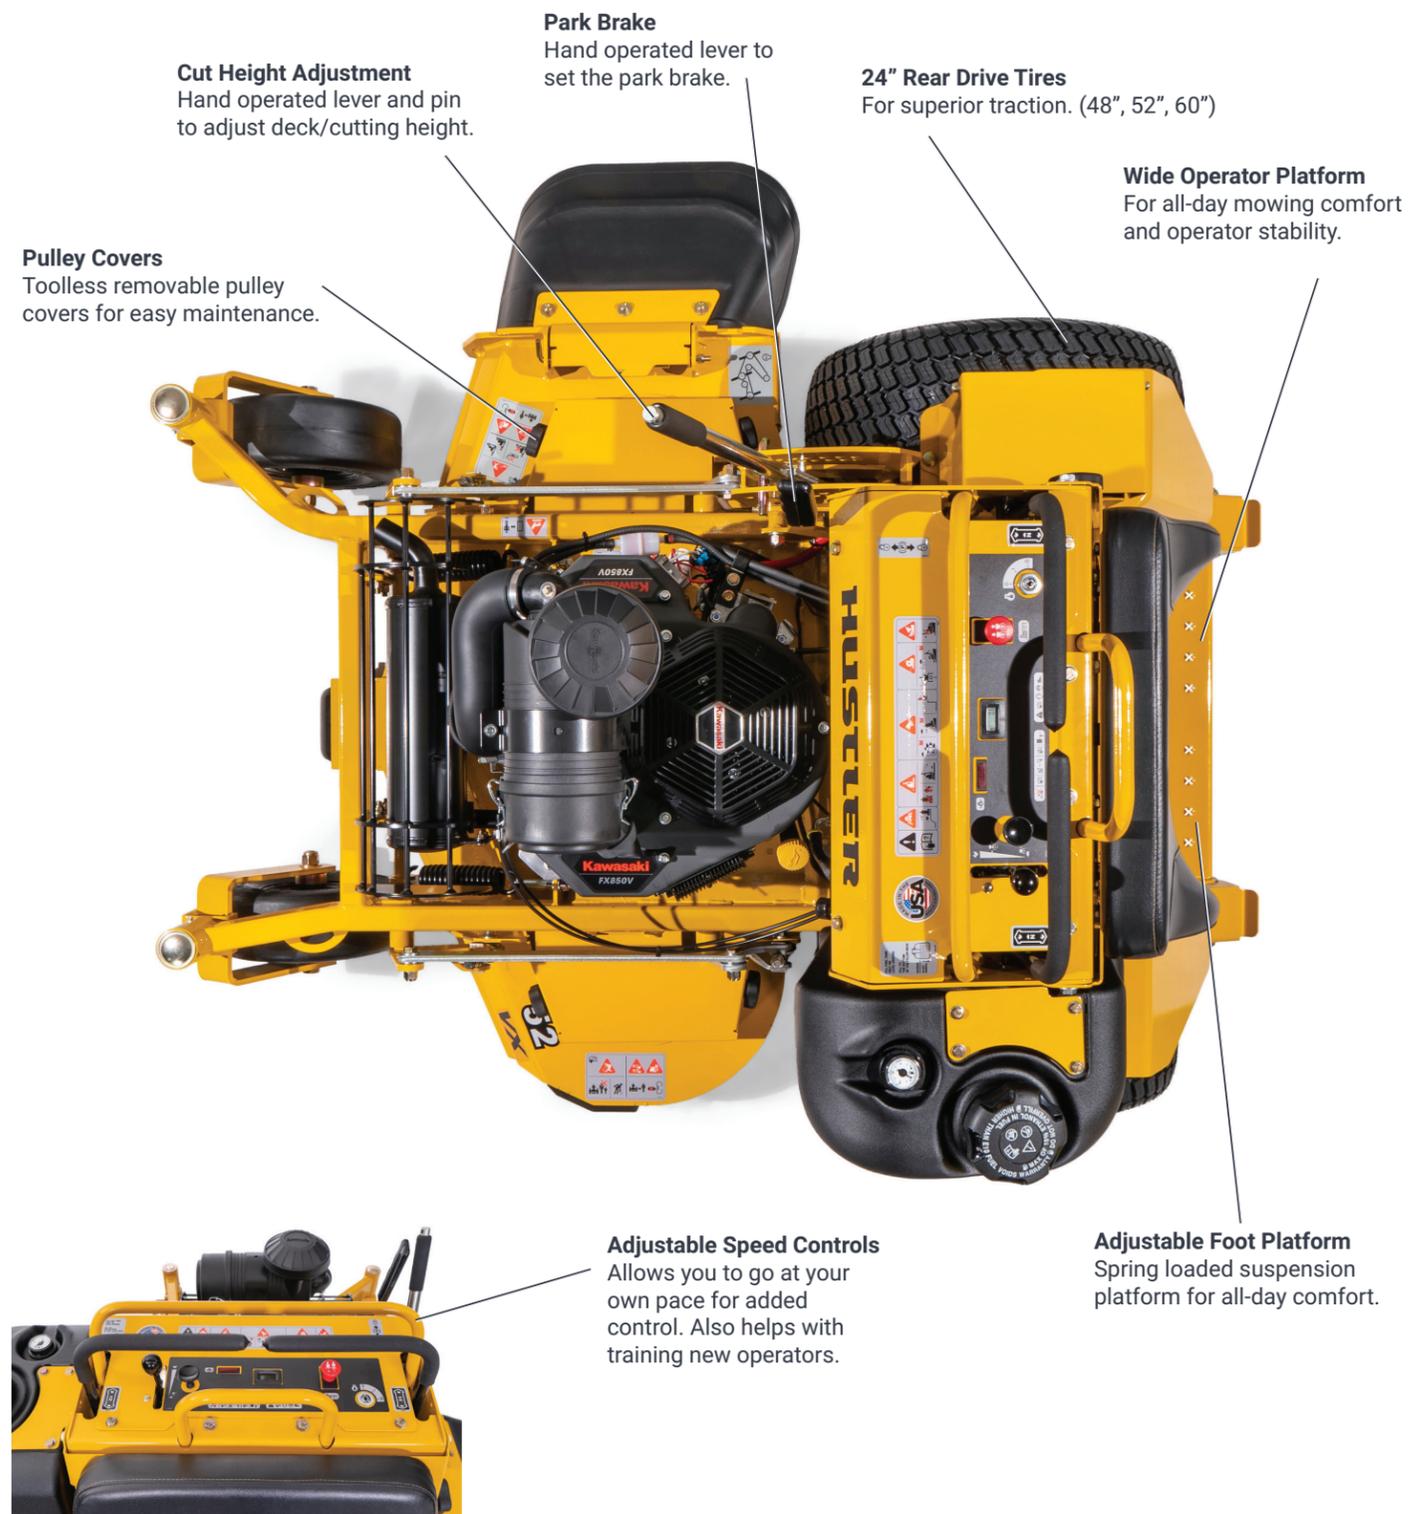

Pulley Covers
Toolless removable pulley covers for easy maintenance.

Cut Height Adjustment
Hand operated lever and pin to adjust deck/cutting height.

Park Brake
Hand operated lever to set the park brake.

24" Rear Drive Tires
For superior traction. (48", 52", 60")

Wide Operator Platform
For all-day mowing comfort and operator stability.

Adjustable Speed Controls
Allows you to go at your own pace for added control. Also helps with training new operators.

Adjustable Foot Platform
Spring loaded suspension platform for all-day comfort.



ACCESSORIES

- ▶ Mulch kit
- ▶ Mesh side bagger (3 bushels)
- ▶ Metal side bagger (3.5 bushels)
- ▶ Light kit
- ▶ Stripe kit
- ▶ Trash basket
- ▶ Cup holder

THE SUPER S STAND-ON MOWER

SUPER S

- ✔ **Compact Stance**
Perfect for tight spaces and for trailering from job-to-job
- ✔ **Service Friendly Design**
Designed to make maintenance and service fast and easy.
- ✔ **SmoothTrak™ Steering**
Precision control to help trim and maneuver easily around obstacles.
- ✔ **VX Deck**
Fabricated 7 ga. steel engineered for extreme vacuum enhancing performance and cut quality.
- ✔ **Deck Options**
36", 48", 52" and 60"



LIMITED WARRANTY
5 YEAR | **1200** HOUR
FIRST 2 YEARS NO HOUR LIMIT