

INTRODUCING THE WZ400 ZERO TURN FLEX DECK MOWER

CONTRACTOR HOMEOWNER
GROUNDS SPORTS
COMMERCIAL TURF
CONSUMER GOLF

FEATURES

THREE 21"/25" FLEX DECKS
HUGS ROLLING TERRAIN
PUSH MOWER ACCURACY
ELIMINATES SCALPING
GAS OR DIESEL


NEW!
Signature
MODEL
WZ400
61" / 73"
WIDTH OF CUT



LASTEC
ARTICULATORS
ART OF MOWING

Featuring a **61" or 73" cutting width, three 21" or 25" flex decks, and zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the accuracy of three small push mowers at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion** for superior cut quality in even the most challenging contours and valleys. With zero turn maneuverability and up to 10

mph speed, the WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, Lastec's **patented belt-driven decks** require minimal maintenance and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

Perfect the Art of Mowing today with the WZ400 Commercial Zero Turn Mower that minimizes investment, maintenance, and fuel consumption while maximizing cut quality, productivity, and performance.


DIMENSIONS & WEIGHT*

Length	85" (2.16m)
Width	(mowing) 75" / 87"
Width	(transport) 69" / 81"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,513lbs - 1,652lbs

CUTTING DECK SYSTEM

Cut Width	61" (154.9 cm) / 73" (185.4 cm)
Blades	Three 21" / 25" High Lift
Deck Segments	Four 21" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	4.44 / 5.13 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- Wheel, 5" Dia Anti-Scalp w/ Zerk
Blade Tip Speed	18,500 FPM (approximate)

12° of articulation
up/down for
each deck

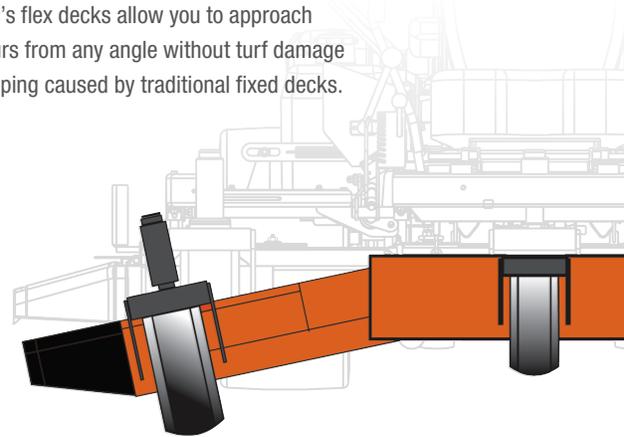

WZ400

ARTICULATION

Lastec's flex decks allow you to approach contours from any angle without turf damage or scalping caused by traditional fixed decks.

TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever Actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air

FEATURES & BENEFITS

- Three 21"/25" flex/articulating rotary cutting decks with 61"/73" cutting width.
- Gas or diesel power options.
- The highest cut accuracy and quality available.
- Heavy duty hydrostatic drive.
- Fully welded frame with lifetime warranty
- 12 gallons, dual 6 gallon self-leveling tanks.
- No tools required to change height in the field.

ENGINE OPTION 1 - 24.8HP DIESEL

Type	Kubota® D902-EF01 3-cylinder, diesel
Emissions Level	EPA/CARB Tier 4 final, EU stage V
Rated Horsepower	24.8hp (SAE J1995)
Displacement	898L/54.80 cu. In.
Air Cleaner	Heavy-Duty Canister Air Filtration System
Cooling System Type	Pressurized radiator, forced circulation with water pump
Alternator Capacity	12V, 60A
Oil System Type	Forced lubrication by trochoid pump
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

ENGINE OPTION 2 - 26.5HP EFI GASOLINE

Type	KOHLER® Command PRO® EFI ECH749 Gasoline, OHV, (closed loop EFI system)
Emissions Level	0=EPA Phase III, 1=CARB Phase III, 2=EU Stage V
Rated Horsepower	26.5hp (747cc) (19.8kw) (SAE J1995)
Displacement	45.0 cu. In.
Air Cleaner	High-efficiency, heavy-duty canister air filtration system
Cooling System Type	Air cooled
Alternator Capacity	12V
Oil System Type	Full pressure w/full-flow filter
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

ENGINE OPTION 3 - 35HP EFI GASOLINE

Type	KOHLER® Command PRO® CH980 Gasoline, OHV
Emissions Level	EPA Phase III
Rated Horsepower	35hp (999cc) (26.1KW) (SAE J1995)
Displacement	61.0 cu. In.
Air Cleaner	High-efficiency, heavy-duty canister air filtration system
Cooling System Type	Air cooled
Alternator Capacity	12V
Oil System Type	Full pressure w/full-flow filter
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

LASTEC
ARTICULATORS
ART OF MOWING

800.515.6798



lastec.com