



240000A E9J404 - 240000AX E9J404

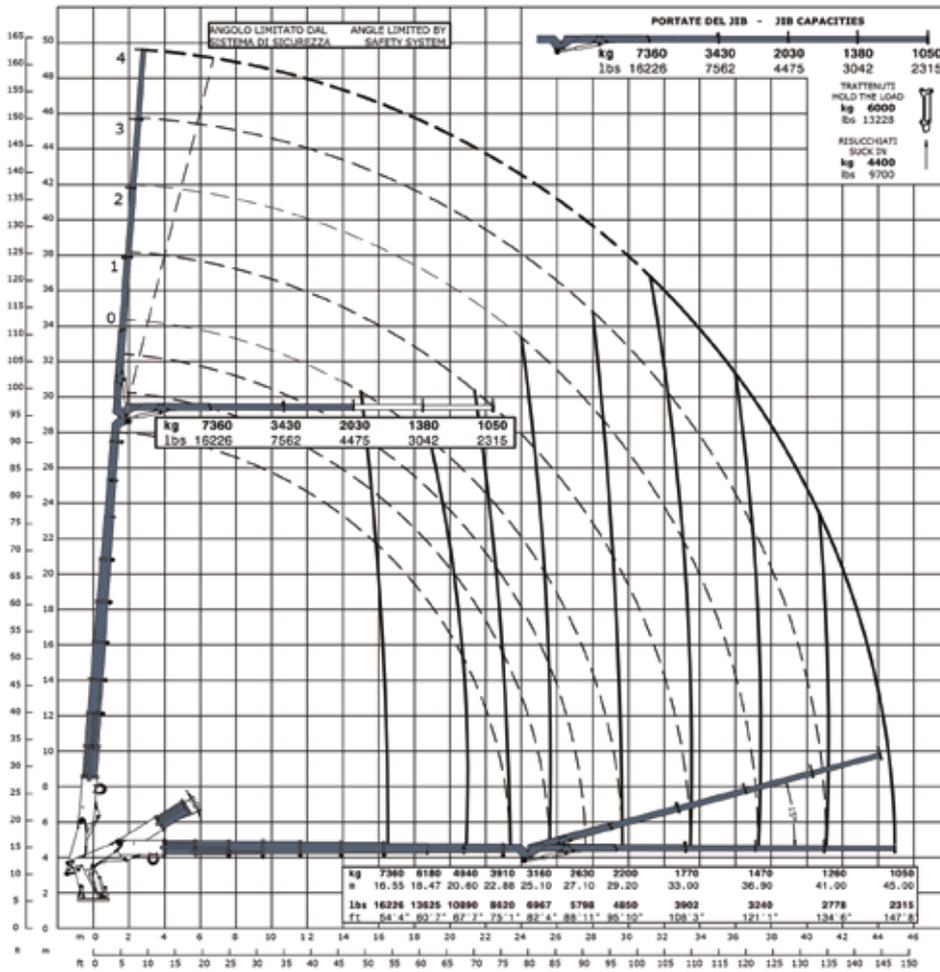

STANDARD

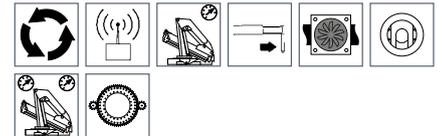

OPTIONAL



| E9J404 | E9J404 | |
|---------------|---------------|---|
| 241500 da N*m | 1747107 Lb*ft | Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranstaulenbolzen |
| 45.00 m | 147' 8" ft | Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite |
| 22000 da N*m | 159157 Lb*ft | Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment |
| 360° 90° sec | 360° 90° sec | Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit |
| 28140 Kg | 62038 lbs | Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne) |
| 29310 Kg | 64615 lbs | Peso (senza olio e montaggio, stab. a X) • Weight (without oil and fitting, Version with outrigger X) Poids (sans huile et montage, version avec bequilles a X) • Gewicht (ohne öl und ohne, abstützung X) |
| 115 l. min | 30 us gal min | Portata pompa (***) • Pump delivery (***) • Capacité de la pompe (***) • Pumpenheistung (***) |
| 320 bar | 4550 psi | Pressione • Pressure • Pression • Druck |
| 700 l | 184 Us gal | Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt |

| E9JC2 | | E9JC3 | | E9JC4 | | E9J402 | | E9J403 | | E9J404 | |
|--------|--------|--------|--------|---------|--------|---------|--------|--------|--------|--------|--------|
| m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs |
| 21.60 | 4730 | 21.60 | 4450 | 21.80 | 4170 | 16.44 | 7960 | 16.55 | 7550 | 16.55 | 7360 |
| 70'9" | 10428 | 70'10" | 9810 | 71'6" | 9193 | 53'11" | 17549 | 54'4" | 16645 | 54'4" | 16226 |
| 23.20 | 440 | 23.30 | 4120 | 23.40 | 3870 | 18.37 | 6880 | 18.48 | 6490 | 18.47 | 6180 |
| 76'2" | 9700 | 76'6" | 9083 | 76'9" | 8532 | 60'3" | 15168 | 60'8" | 14308 | 60'7" | 13625 |
| 25.40 | 3720 | 25.50 | 3430 | 25.60 | 3200 | 20.48 | 5640 | 20.60 | 5260 | 20.60 | 4940 |
| 83'4" | 8201 | 83'8" | 7562 | 84'0" | 7055 | 67'2" | 12434 | 67'7" | 11596 | 67'7" | 10890 |
| 27.40 | 3260 | 27.50 | 2940 | 27.60 | 2700 | 22.77 | 4610 | 22.89 | 4240 | 22.88 | 3910 |
| 89'11" | 7121 | 90'3" | 6482 | 90'7" | 5952 | 74'8" | 10163 | 75'1" | 9348 | 75'1" | 8620 |
| 29.50 | 2830 | 29.60 | 2540 | 29.70 | 2310 | 25.00 | 3860 | 25.09 | 3490 | 25.10 | 3160 |
| 96'10" | 6239 | 97'2" | 5600 | 97'6" | 5093 | 82'0" | 8510 | 82'4" | 7694 | 82'4" | 6967 |
| 33.30 | 2440 | 33.40 | 2150 | 33.50 | 1920 | 27.00 | 3330 | 27.10 | 2960 | 27.10 | 2630 |
| 109'3" | 5380 | 109'7" | 4740 | 109'11" | 4233 | 88'7" | 7341 | 88'11" | 6526 | 88'11" | 5798 |
| 37.10 | 1670 | 37.20 | 1400 | 37.30 | 11801 | 29.06 | 2900 | 29.17 | 2520 | 29.20 | 2200 |
| 121'9" | 3682 | 122'1" | 3086 | 122'5" | 1602 | 95'4" | 6393 | 95'8" | 5556 | 95'10" | 4850 |
| | | 41.00 | 1030 | 41.10 | 810 | 32.89 | 2470 | 33.01 | 2100 | 33.00 | 1770 |
| | | 134'5" | 2271 | 134'9" | 1786 | 107'11" | 5445 | 108'4" | 4630 | 108'3" | 3902 |
| | | | | 44.90 | 630 | 36.80 | 2180 | 36.92 | 1800 | 36.90 | 1470 |
| | | | | 147'5" | 1389 | 120'9" | 4806 | 121'2" | 3968 | 121'1" | 3240 |
| | | | | | | | | 40.95 | 1600 | 41.00 | 1260 |
| | | | | | | | | 134'4" | 3527 | 134'6" | 2778 |
| | | | | | | | | | | 45.00 | 1050 |
| | | | | | | | | | | 147'8" | 2315 |

