


PK 65002 SH


HIGH PERFORMANCE

Outstanding movement geometry.


B

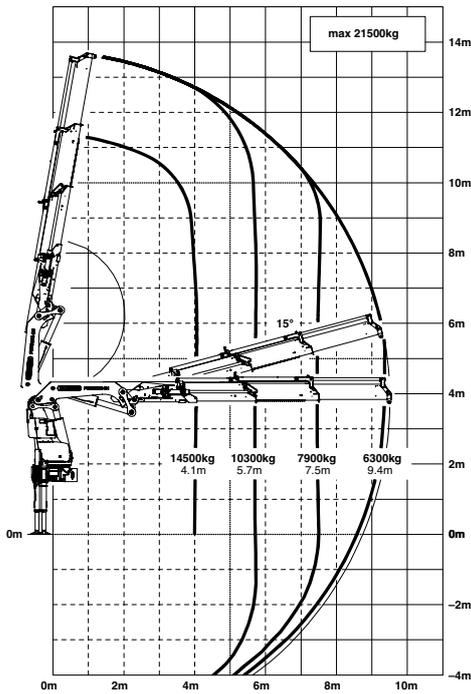


C

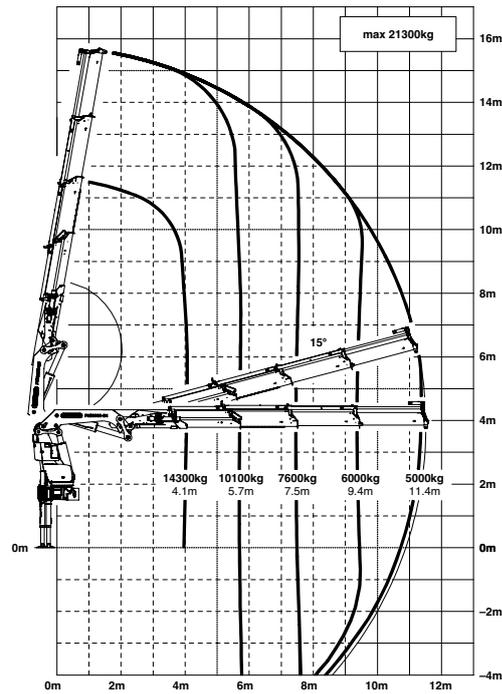

E

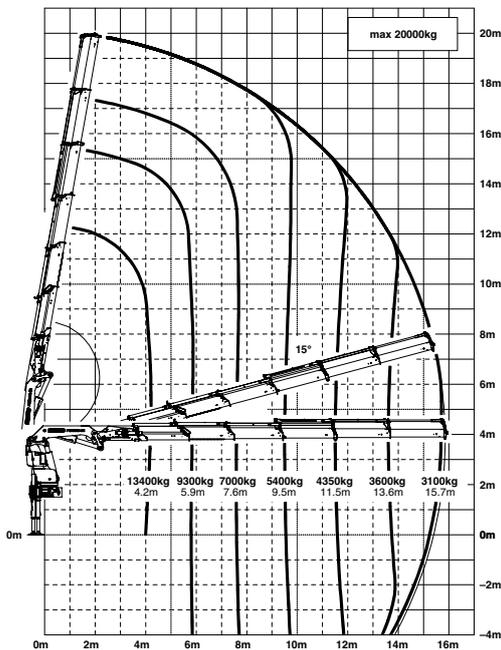

G

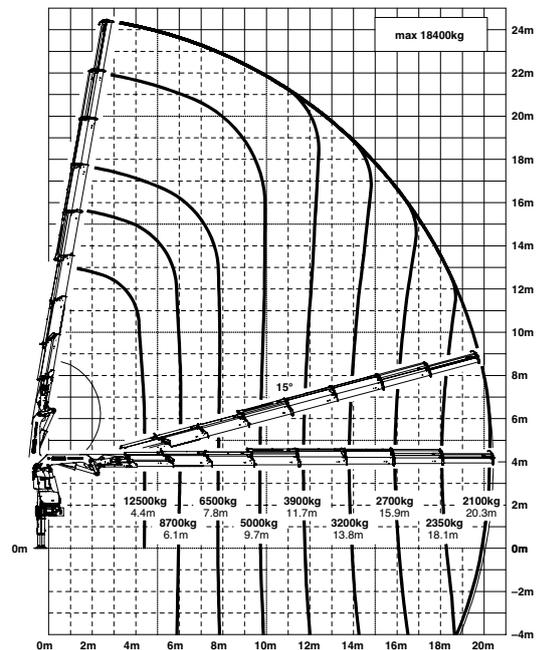

The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

Lifting capacities

| max. | | 21800 kg | 48100 lbs | A |
|-------|--------|-----------------|------------------|----------|
| 4.0 m | 13' 1" | 14800 kg | 32700 lbs | |
| 5.7 m | 18' 8" | 10600 kg | 23400 lbs | |
| 7.4 m | 24' 3" | 8200 kg | 18100 lbs | |

| max. | | 21500 kg | 47400 lbs | B |
|-------|---------|-----------------|------------------|----------|
| 4.1 m | 13' 5" | 14500 kg | 32000 lbs | |
| 5.7 m | 18' 8" | 10300 kg | 22700 lbs | |
| 7.5 m | 24' 7" | 7900 kg | 17400 lbs | |
| 9.4 m | 30' 10" | 6300 kg | 13900 lbs | |

| max. | | 21300 kg | 47000 lbs | C |
|--------|---------|-----------------|------------------|----------|
| 4.1 m | 13' 5" | 14300 kg | 31400 lbs | |
| 5.7 m | 18' 8" | 10100 kg | 22200 lbs | |
| 7.5 m | 24' 7" | 7600 kg | 16800 lbs | |
| 9.4 m | 30' 10" | 6000 kg | 13300 lbs | |
| 11.4 m | 37' 5" | 5000 kg | 10900 lbs | |

| max. | | 20700 kg | 45700 lbs | D |
|--------|---------|-----------------|------------------|----------|
| 4.2 m | 13' 9" | 13700 kg | 30200 lbs | |
| 5.8 m | 19' 0" | 9600 kg | 21200 lbs | |
| 7.6 m | 24' 11" | 7300 kg | 16000 lbs | |
| 9.5 m | 31' 2" | 5700 kg | 12500 lbs | |
| 11.5 m | 37' 9" | 4650 kg | 10200 lbs | |
| 13.6 m | 44' 7" | 3900 kg | 8600 lbs | |


| max. | | 20000 kg | 44100 lbs | E |
|--------|---------|-----------------|------------------|----------|
| 4.2 m | 13' 9" | 13400 kg | 29500 lbs | |
| 5.9 m | 19' 4" | 9300 kg | 20600 lbs | |
| 7.6 m | 24' 11" | 7000 kg | 15300 lbs | |
| 9.5 m | 31' 2" | 5400 kg | 11900 lbs | |
| 11.5 m | 37' 9" | 4350 kg | 9600 lbs | |
| 13.6 m | 44' 7" | 3600 kg | 8000 lbs | |
| 15.7 m | 51' 6" | 3100 kg | 6800 lbs | |

| max. | | 19100 kg | 42100 lbs | F |
|--------|---------|-----------------|------------------|----------|
| 4.3 m | 14' 1" | 12900 kg | 28500 lbs | |
| 6.0 m | 19' 8" | 9000 kg | 19900 lbs | |
| 7.7 m | 25' 3" | 6700 kg | 14700 lbs | |
| 9.6 m | 31' 6" | 5200 kg | 11300 lbs | |
| 11.6 m | 38' 1" | 4100 kg | 9100 lbs | |
| 13.7 m | 44' 11" | 3400 kg | 7400 lbs | |
| 15.8 m | 51' 10" | 2900 kg | 6300 lbs | |
| 18.0 m | 59' 1" | 2500 kg | 5600 lbs | |

| max. | | 18400 kg | 40600 lbs | G |
|---------|---------|-----------------|------------------|----------|
| 4.4 m | 14' 5" | 12500 kg | 27600 lbs | |
| 6.1 m | 20' 0" | 8700 kg | 19300 lbs | |
| 7.8 m | 25' 7" | 6500 kg | 14200 lbs | |
| 9.7 m | 31' 10" | 5000 kg | 10900 lbs | |
| 11.7 m | 38' 5" | 3900 kg | 8600 lbs | |
| 13.8 m | 45' 3" | 3200 kg | 7000 lbs | |
| 15.9 m | 52' 2" | 2700 kg | 6000 lbs | |
| 18.1 m | 59' 5" | 2350 kg | 5200 lbs | |
| 20.3 m | 66' 7" | 2100 kg | 4600 lbs | |
| 22.6 m* | 74' 2" | 1780 kg | 3900 lbs | |
| 24.9 m* | 81' 8" | 1000 kg | 2200 lbs | |

*mechanical extension

D PJ170E JV1 DPS PLUS

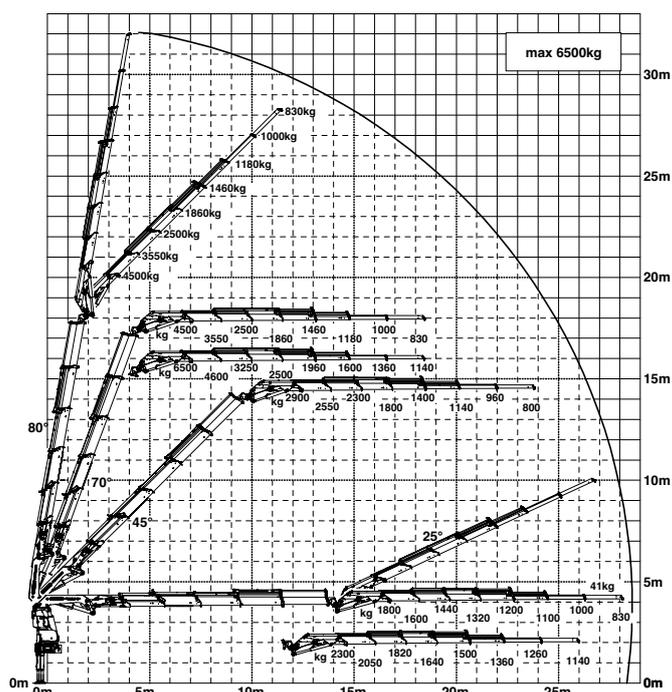

F PJ125E JV1 DPS PLUS

