


PK 63002


HIGH PERFORMANCE

Perfect for high outreaches.


D

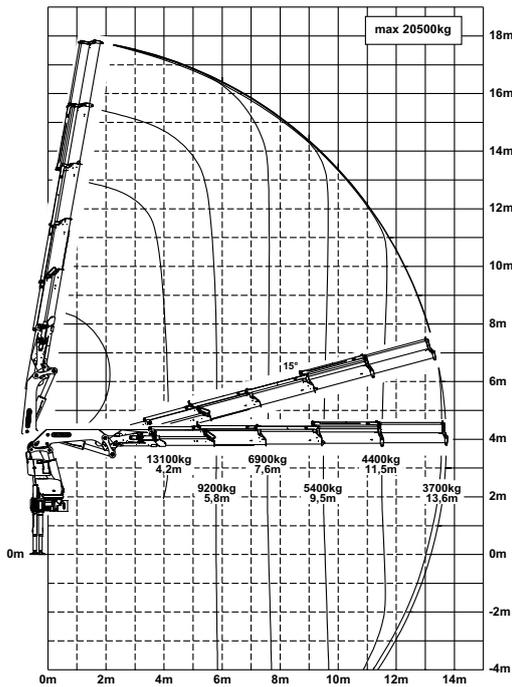


E

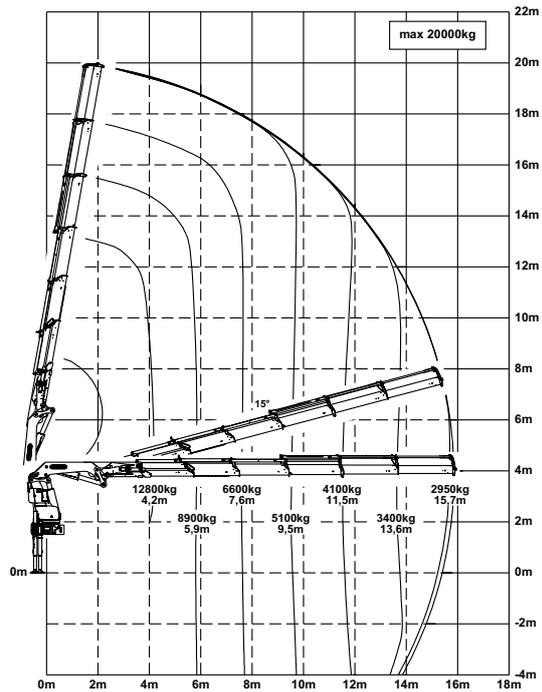

G

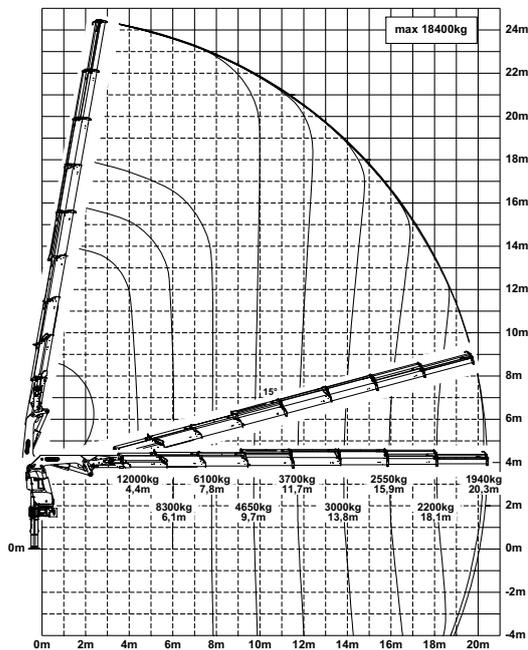


D PJ170E JV1

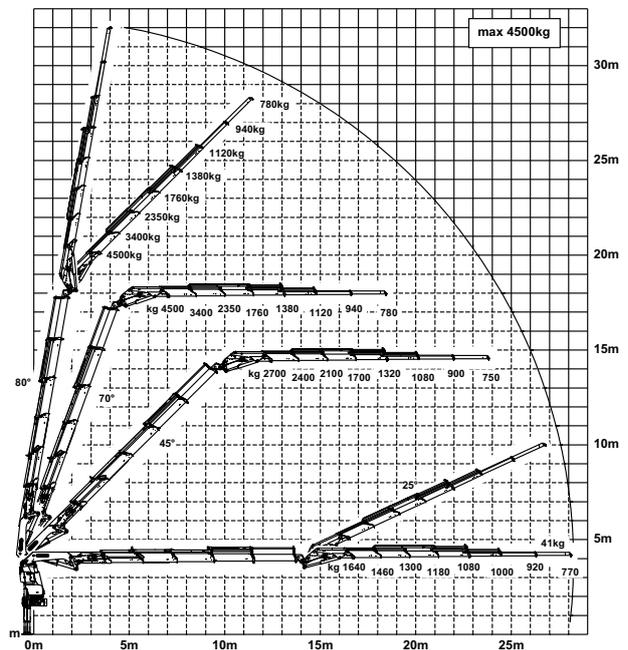


The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

Lifting capacities

F

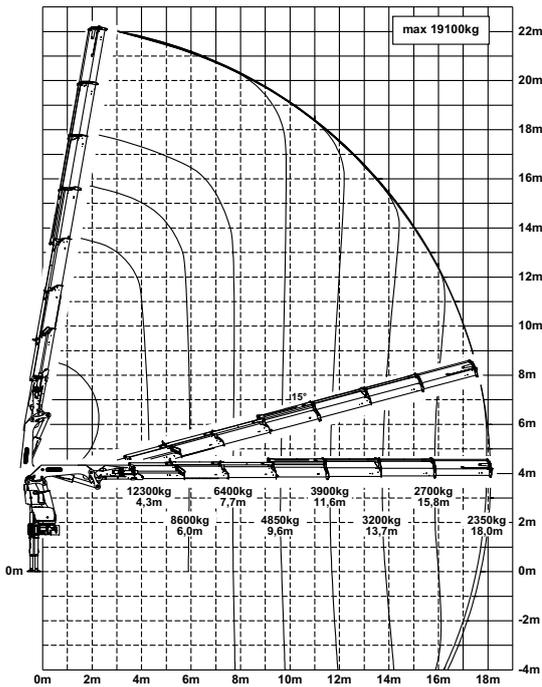

E PJ125E JV1

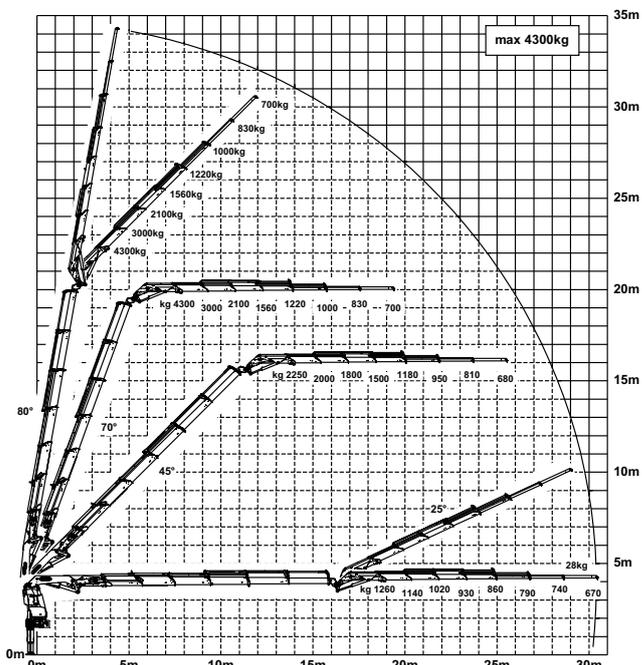

max.		21800 kg	48100 lbs	A
4.0 m	13 ft	14200 kg	31300 lbs	
5.7 m	19 ft	10200 kg	22400 lbs	
7.4 m	24 ft	7900 kg	17300 lbs	

max.		21500 kg	47400 lbs	B
4.1 m	13 ft	13900 kg	30600 lbs	
5.7 m	19 ft	9900 kg	21700 lbs	
7.5 m	24 ft	7500 kg	16600 lbs	
9.4 m	31 ft	6000 kg	13200 lbs	

max.		21300 kg	47000 lbs	C
4.1 m	13 ft	13700 kg	30100 lbs	
5.7 m	19 ft	9600 kg	21200 lbs	
7.5 m	24 ft	7300 kg	16000 lbs	
9.4 m	31 ft	5800 kg	12700 lbs	
11.4 m	37 ft	4750 kg	10400 lbs	

max.		20500 kg	45200 lbs	D
4.2 m	13 ft	13100 kg	28800 lbs	
5.8 m	19 ft	9200 kg	20300 lbs	
7.6 m	25 ft	6900 kg	15200 lbs	
9.5 m	31 ft	5400 kg	11900 lbs	
11.5 m	38 ft	4400 kg	9700 lbs	
13.6 m	45 ft	3700 kg	8200 lbs	

max.		20000 kg	44100 lbs	E
4.2 m	14 ft	12800 kg	28100 lbs	
5.9 m	19 ft	8900 kg	19600 lbs	
7.6 m	25 ft	6600 kg	14600 lbs	
9.5 m	31 ft	5100 kg	11300 lbs	
11.5 m	38 ft	4100 kg	9100 lbs	
13.6 m	45 ft	3400 kg	7500 lbs	
15.7 m	52 ft	2950 kg	6500 lbs	

max.		19100 kg	42100 lbs	F
4.3 m	14 ft	12300 kg	27200 lbs	
6.0 m	20 ft	8600 kg	18900 lbs	
7.7 m	25 ft	6400 kg	14000 lbs	
9.6 m	32 ft	4850 kg	10700 lbs	
11.6 m	38 ft	3900 kg	8500 lbs	
13.7 m	45 ft	3200 kg	7000 lbs	
15.8 m	52 ft	2700 kg	6000 lbs	
18.0 m	59 ft	2350 kg	5200 lbs	

max.		18400 kg	40600 lbs	G
4.4 m	14 ft	12000 kg	26300 lbs	
6.1 m	20 ft	8300 kg	18300 lbs	
7.8 m	26 ft	6100 kg	13500 lbs	
9.7 m	32 ft	4650 kg	10300 lbs	
11.7 m	38 ft	3700 kg	8100 lbs	
13.8 m	45 ft	3000 kg	6600 lbs	
15.9 m	52 ft	2550 kg	5600 lbs	
18.1 m	59 ft	2200 kg	4850 lbs	
20.3 m	66 ft	1940 kg	4300 lbs	
22.6 m*	74 ft	1660 kg	3650 lbs	
24.9 m*	82 ft	1000 kg	2200 lbs	

*mechanical extension